

Route 2, Box 688A,
Grants Pass, Oregon.

May 15, 1956

Mr. Ben B. Irving,
County Surveyor,
Douglas County,
Roseburg, Oregon.

Dear Mr. Irving:

The standard $\frac{1}{4}$ sec. cor. of sec. 32, on the S. bdy. of sec. 32, T. 32 S., R. 7 W., W. M., Oregon, was rehabilitated by me at the request of Dollar and Patterson Co., Inc., of Glendale, Oregon. The detailed description of rehabilitated corner is as follows:

The point for standard $\frac{1}{4}$ sec. cor. of secs. 32 on the S. bdy. of .sec. 32, T. 32 S., R. 7 W., W. M., Oregon, is determined at the record bearing and distance from the extant original bearing tree:


At the corner point,

Set an iron pipe, 3 ft. long, $1\frac{1}{2}$ ins. diam., 28 ins. in the ground, mkd. RS33; from which the original bearing tree:

A Douglas fir, 36 ins. diam., bears S.20°W., 20 lks. dist., mkd. on bark SC $\frac{1}{4}$ S BT.

And a new bearing tree:

An incense cedar, 10 ins. diam., bears N.75°E., 28 lks. dist., mkd. SC $\frac{1}{4}$ S32 RS33 BT.

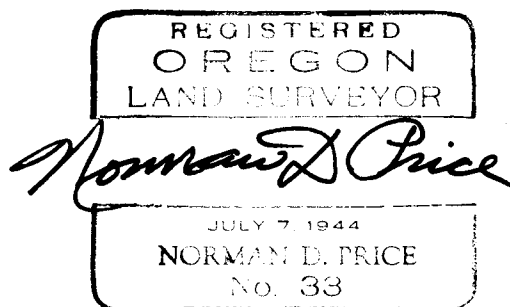

FILED
RECEIVED

MAY 22 1956

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

C. S. File No. 42/143-3