

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to Sections 1 and 2,
T. 23S, R. 10W, W.M., Douglas County, Oregon.

ORIGINAL

Post (now missing) from which a:

- 8" Fir bears S25°E 28 lks.; now 29", exposed portion of scribe S,
(bearing is S38°E)
- 24" Fir bears S88°W 46 lks.; now 40", bark scribes T23S R10W S2
BT visible.

RETRACEMENT by Levi Walker, 1906

Post (found, rotted and down, scribes T23S R10W S1 and 2 visible)

RESTORED

Var. 20°


Set 1½" x 36" galvanized ironpipe with 3" bronze cap marked
"OREGON STATE BOARD OF FORESTRY T22S R10W S36 T23S R10W S1 S2 1957
RS 359," 33 inches in ground, and from which a:

- 16" Fir bears S44°W 13.5 ft.; scribed RS 359
- 40" Fir (orig.) bears S88°W 30.4 ft.; scribed BT in wood.

Oregon State Board of Forestry metal location poster on 16" Fir BT.

Dated September 9, 1957.

Restored by Elbert Driver under my direction.
Elbert Driver, Engineering Aide

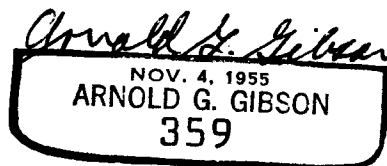

Present and witnessed by Bob Banks
Derald Timmons
Dick Rugh