

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

One-Quarter corner on South side Section 2, T.23S,
R. 10W, W.M., Douglas County, Oregon.

ORIGINAL

Fir Post (now missing, point falls in cat road) from which a:

- 16" Fir bears S44E 21 lks.; now 27" stump, scribes 1/4 visible on exposed face.
- 12" Fir bears N34E 13 lks.; now 17" stump, pushed over in place, portion of scribes 1/4 visible.

RESTORED


Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY 1/4 S2 1957 RS359," 33 inches in ground, in mound of stone, and from which a:

- 40" Fir bears N20E 46.7 ft.; scribed 1/4 S2 BT
- 36" Fir bears N65W 36.5 ft.; scribed RS359

Oregon State Board of Forestry metal location poster on 36" Fir BT.

Dated January 24, 1958.

Restored by Elbert Driver under my direction.
Elbert Driver, Transitman

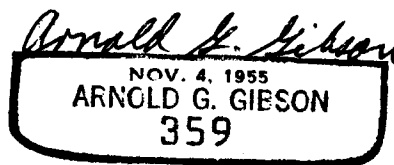

Present and witnessed by Bob Banks
Derald Timmons
Ron Witham

FILED
RECEIVED

FEB 24 1958

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.