

Correction Report\*

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

One Quarter corner for Section 10 (South side)  
T. 22S, R. 11W, W.M., Douglas County, Oregon.

ORIGINAL

Post (now missing, found 4 x 4 x 48" white painted Cedar post in stone mound out of place) from which a:

- 8" Fir bears S72E 75 lks.; now 33", face unexposed.
- 12" Fir bears N80E 74 lks.; now 36", uncovered scribes 1/4 S, remainder unexposed.

RESTORED


Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked OREGON STATE BOARD OF FORESTRY 1/4 S10 1958 RS359", 33 inches in ground, in mound of stone, and from which a:

- 28" Fir bears S4 1/4 W 24.8 ft.; scribed RS359.
- 41" Fir bears N57 1/2 E 79.8 ft.; scribed 1/4 S10 BT.

Oregon State Board of Forestry metal location poster on orig. 12" Fir BT.

Dated July 11, 1958

Restored by Elbert Driver under my direction.  
Elbert Driver, Transitman

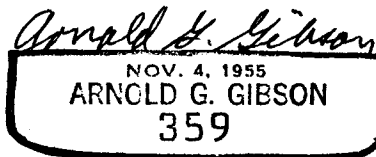

Present and witnessed by Derald Timmons  
Ron Witham

\*Replaces report of Jan. 3, 1958

FILED  
RECEIVED

JUL 13 1958

COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.

K.C.S. File No. 42/340<sup>y</sup>