

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Section corner common to Sections 3 and 10 (West Side) T. 22S, R. 11W, W.M., Douglas County, Oregon.

ORIGINAL

Stone 12"x10"x7" (found lying down in place, 5 notches on S and 3 notches on E. 4x4x48" white painted cedar post along side).

12" Dead Cedar bears N30E 22 lks.; now missing.

RESURVEY by William Whipple, 1893

4" Willow bears N74E 10 lks.; now missing.

3" Alder bears S31W 50 lks.; now missing.

5" Willow bears N11W 8 lks.; now missing.

A 4' rock bluff bears south 4 lks; now in place.

RESTORED

Var. 20 $\frac{1}{2}$ E

Reset original stone in ground in mound of rock, and from which a:

32" Fir bears S82 $\frac{1}{2}$ E 77.6 ft.; scribed T22S R11W S10 BT.

12" Fir stp. bears S27 $\frac{1}{2}$ W 9.7 ft.; scribed RS 359.


4' high rock bluff bears S5 $\frac{1}{2}$ W 5.0 ft.; scribed X B0 (2' up from bottom)

Reset 4x4x48" white painted Cedar post 2.5' NE of corner stone.

Oregon State Board of Forestry metal location poster on 14" Alder N67E 27.0'

Dated January 3, 1958.

Restored by Elbert Driver under my direction.  
Elbert Driver, Transitman

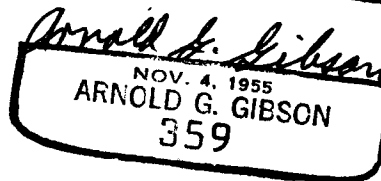

FILED  
RECEIVED

Present and witnessed by Derald Timmons  
Ron Witham

FEB 24 1958

COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.

C. S. File No. 42/340-8