

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY  
(See official plat)  
North 1/16 corner for Section 2 (East side), T. 23S,  
R. 10W, W.M., Douglas County, Oregon.

ESTABLISHED

Var. 20½°E

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY N 1/16 S2 1958 RS359," 33 inches in ground, and from which a:

28" Fir bears S16W 24.2 ft.; scribed N 1/16 S2 BT.

38" Fir bears N39W 36.0 ft.; scribed N 1/16 S2 BT RS359.

Set 4 x 4 x 72" white painted Cedar post 1.0' SE of pipe.

Oregon State Board of Forestry metal location poster on 28" Fir BT.

Northeast 1/16 corner for Section 2, T. 23S, R. 10W.,  
Douglas County, Oregon.

ESTABLISHED

Var. 20½°E

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY NE 1/16 S2 1958 RS 359," 33 inches in ground, in mound of stone, and from which a:

14" Fir bears S29E 37.9 ft.; scribed NE 1/16 S2 BT.

14" Fir bears N52½W 21.6 ft.; scribed NE 1/16 S2 BT.



65" Fir bears N37½W 36.4 ft.; scribed RS 359.

Set 4 x 4 x 72" white painted Cedar post 1.0' NW of pipe.

Oregon State Board of Forestry metal location poster on 10" Fir N30½ W 6.3'.

Dated April 4, 1958.

Established by Elbert Driver under my direction.  
Elbert Driver, Transitman

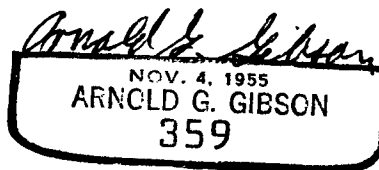

Present and witnessed by Ron Witham  
Floyd Peachee

FILED  
RECEIVED

APR 25 1958

COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.

C. S. File No. 42/353 3