

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY
(See official plat)
Center West 1/16 corner for Section 2, T. 23S, R. 10W,
W.M., Douglas County, Oregon.

ESTABLISHED

Var. 20½°E

Marked an X on a Rock bluff, and from which a:

20" Fir bears S9½E 61.8 ft.; scribed CW 1/16 S2 BT.

21" Fir bears N78W 23.1 ft.; scribed CW 1/16 S2 BT RS359.

Oregon State Board of Forestry metal location poster on 21" Fir BT.

Also poster on a 4 x 4 x 72" white painted Cedar post S89° 44'E 638.2' on East edge of road.

Edge of 100' high rock bluff bears N & E 15.0'.

✓ North 1/16 corner common to Sections 2 and 3, T. 23S,
R. 10W, W.M., Douglas County, Oregon.

ESTABLISHED

Var. 20½°E

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY N 1/16 S2 S3 1958 RS359," 33 inches in ground, in mound of stone, and from which a:

32" Fir bears N65E 42.0 ft.; scribed N 1/16 S2 BT.

26" Fir bears N41W 20.2 ft.; scribed N 1/16 S3 BT RS359.

75' high Rock bluff bears S67½W 40.5 ft.; scribed X B0.


Set 4 x 4 x 72" white painted Cedar post 2.0' SW of pipe.

Oregon State Board of Forestry metal location poster on 12" Maple S56W 31.7'.

Dated April 4, 1958.

Established by Elbert Driver under my direction.
Elbert Driver, Transitman

Present and witnessed by Derald Timmons
Ron Witham
Floyd Peachee

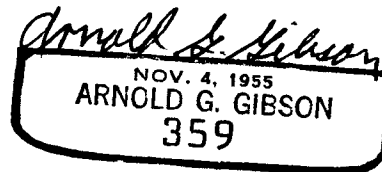

FILED
RECEIVED

APR 25 1958

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

C. S. File No. 42/353-5