

ESTABLISHED CORNERS FOR OREGON STATE BOARD OF FORESTRY

(See official plat)

Witness corner for center North 1/16 corner for Section 2 (18.6 ft. N89° 51'W from C N 1/16), T. 23S, R. 10W, W.M., Douglas County, Oregon.

ESTABLISHED

Var. 20½°E

Marked an X on Rock outcrop from which a:

- 20" Fir bears N40½W 25.5 ft.; scribed X BT RS359.
- 33" high x 60" dia. Rock bears S3W 18.2 ft.; scribed X B0.
- 7' x 10' x 6' high boulder bears SW 3.0 ft.

Oregon State Board of Forestry metal location poster on 6" Fir S88½E 12.6'.
West edge Mill Creek bears East 40.0'.
East edge Mill Creek bears East 110.0'.

✓ Northwest 1/16 corner for Section 2, T.23S, R. 10W, W.M., Douglas County, Oregon.

ESTABLISHED

Var. 20½°E

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY NW 1/16 S2 1958 RS359," 33 inches in ground, in mound of stone, and from which a:


- 19" Fir bears N84E 16.0 ft.; scribed NW 1/16 S2 BT.
- 28" Fir bears S37W 24.6 ft.; scribed NW 1/16 S2 BT RS359.
- 26' x 38' x 26' high Rock bears S4½E 107.3 ft.; scribed X B0.

Set 4 x 4 x 72" white painted Cedar post 1.5 ft. SE of pipe.

Oregon State Board of Forestry metal location poster on 30" Fir N43W 12.1'.

Dated April 4, 1958.

Established by

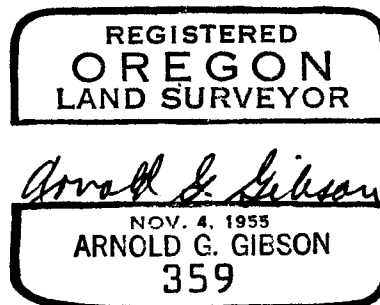

Present and witnessed by Elbert Driver
Derald Timmons
Ron Witham

FILED
RECEIVED

APR 25 1958

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.