

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Witness Point common to Sections 19 and 24, T22S,  
R11 & 12W, W.M., Douglas County, Oregon.

ORIGINAL

12" Line tree at 57.89 chains South on East boundary Sec. 24, 2 notches North and South sides (found uprooted, notches remaining, root hole in place) from which a:

Ridge, course E & W, bears South 21 lks.; now in place.

RESTORED

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY W P S24 S19 1960 RS359", 30 inches in ground, in mound of rock, and from which a:

26" double Fir bears S7W 15.2 ft.; scribed WP S24 BT RS359.

17" Fir bears S56E 10.3 ft.; scribed WP S19 BT.


3' high by 6' wide rock face bears S39W 2.7 ft.; scribed X.

Oregon State Board of Forestry metal location poster on 26" Fir BT.

Set 4 x 4 x 72" white painted Cedar post 1.0 ft. East of pipe.

Dated December 7, 1960

Restored by

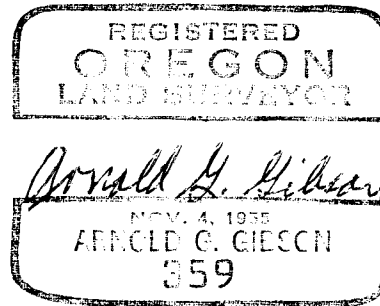

Present and witnessed by G. Shore