

RESTORED WITNESS POINT FOR OREGON STATE BOARD OF FORESTRY

Line Tree common to Sections 19 and 25, T22S, R11 & 12W,
W.M., Douglas County, Oregon.

ORIGINAL

14" Fir line tree at 7.63 chains South on the East boundary of Section 25 with
2 notches on the North & South sides (now 28" in place, exposed one notch
on South side 67 years old.

Ridge top at 6.90 chains South on the East boundary of Section 25 (now in CCC
road).

RESTORED

Var. 20 $\frac{1}{2}$ °E

Scribed Line tree as Witness Point, WP S19 on East side and WP S25 RS359 on West
side, from which a:


41" Fir bears N88 $\frac{1}{2}$ °E 56.8 ft.; scribed WP S19 BT.

36" Fir bears S43W 12.4 ft.; scribed WP S25 BT.

Oregon State Board of Forestry metal location poster on original Fir Line tree.
Also poster on 4" x 4" x 72" white painted Cedar post S89 $\frac{1}{2}$ °E 38.8' on East edge
of CCC road.

Dated December 20, 1960

Restored by

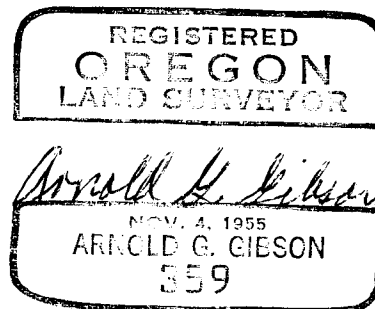

Present and witnessed by Elbert Driver
John Hollingsworth

42/403-13