

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

One Quarter Section corner common to Sections 11  
and 14, T22S, R11W, W.M., Douglas County, Oregon.

ORIGINAL

15" Alder (now 17" windfall, faces rotten) from which a:

30" Cedar bears S45W 37 lks.; now 61", rotten face exposed, no scribe  
marks visible.

14" Alder bears N45E 31 lks.; now 21" rotten stump.

Dry Creek, course North, bears East 85 lks.; in place.

RESTORED

Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE  
BOARD OF FORESTRY 1/4 S11 S14 1961 RS359", 33" inches in ground, in  
mound of stone, and from which a:

61" Cedar (Original) bears S47½W 21.7 ft.; scribed 1/4 S14 BT.

60" Cedar bears N58W 29.1 ft.; scribed 1/4 S11 BT.

14" Cedar bears S87½E 16.9 ft.; scribed RS359.

Oregon State Board of Forestry metal location poster on 14" Cedar BT.


Set 4" x 4" x 6' white painted Cedar post 1.7' SE of pipe.

Dated February 6, 1961

Restored by George E. Shore, Jr. under my direction.  
George E. Shore, Jr., Transitman



Present and witnessed by R. Banks  
P. Lewellyn  
T. South

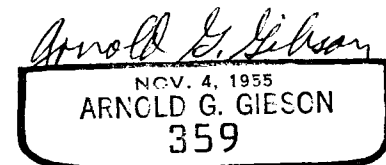

FILED  
RECEIVED

MAR 17 1961

COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.

C.S. File No. 42/403-17