

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Closing Section corner common to Sections 33 and 34, T23S, R10W, W.M., Douglas and Coos Counties, Oregon.

ORIGINAL

By W. H. Byars. See Resurvey below.

RESURVEY by LEVI WALKER in 1905

Hemlock post (now missing) from which a:

- 30" Fir bears N6°E 29 lks.; now 30" windfall scribes S34 T23 R10W BT on exposed face.
- 16" Fir bears N73W 66 lks.; now 18" Snag, Scribes 33 BT on exposed face.

RESTORATION by Elliott Survey of 1936

4" x 5" Hemlock Post (found, not in place) from which a:

- 24" Fir bears N10W 15 ft.; original 30" BT.
- 18" Fir bears S62W 22 ft.; now 24", bearing S76W 24.2', scribes 33 in exposed face.

RESTORED


Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY CC T23S R10W S33 S34 S3 T24S R10W 1960 RS359", 33 inches in ground, in mound of stone, and from which a:

- 48" Fir bears N38E 29.6 ft.; scribed CC T23S R10W S34 RS359 BT.
- 32" Fir bears N18½W 28.9 ft.; scribed CC S33 T23S R10W BT.

Oregon State Board of Forestry metal location poster on 18" Fir BT.
Set 4" x 4" x 6' white painted Cedar post 1.5' South of pipe.

Dated April 27, 1960

Restored by George E. Shore, Jr. under my direction.
George E. Shore, Jr., Transitman

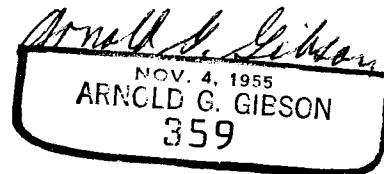

FILED

RECEIVED

MAY 17 1960

Present and witnessed by R. Banks
P. Lewellyn
G. Mahoney

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.