

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

Angle point corner common to Sections 34 and 3,  
(Byars 1879 Section corner 33, 34, 3 and 4) T23  
and 24S, R10W, W.M., Douglas and Coos Counties,  
Oregon.

ORIGINAL

Maple post (now missing) from which a:

- 24" Fir bears N78E 10 lks.; now 34", scribes S34 T23S R 0 W visible.
- 30" Fir bears S65E 7 lks.; now 36", scribes S3 visible.
- 16" Fir bears S74W 20 lks.; now rotted 2 ft. high stub.
- 24" Fir bears N15W 28 lks.; now 30" rotted stub, axe work remaining.

NOTE: Surveys in 1896 and 1905 reported destroying corner and defacing the  
BT's. Apparently the portion of the face covered by overgrowth was  
not chopped out then.

RESTORED


Set 1½" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE  
BOARD OF FORESTRY T23S R10W AP S34 S3 T24S 1960 RS 359", 32 inches in  
ground, and from which a:

30" Fir bears S85W 26.2 ft.; scribed RS359.

Oregon State Board of Forestry metal location poster on original 30" Fir BT.  
Set 4 x 4 x 72" white painted Cedar post 1.5 ft. NE of pipe.

Dated June 10, 1960

Restored by

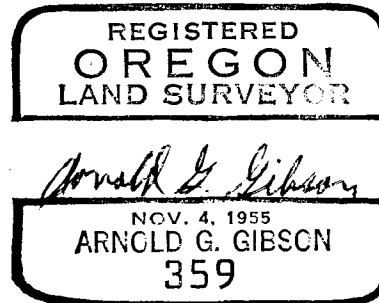

Present and witnessed by D. Steenson  
C. Skog  
P. Lewellyn

FILED  
RECEIVED

JUL 10 1960

COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.

✓ C. S. File No. 42/422 6