


SECTION 14 TOWNSHIP 22 South RANGE Range 4 West

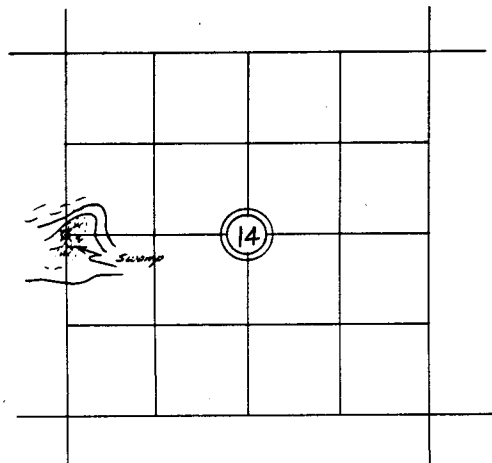

--- LINE MARKED BY NOTCH CUT IN BLAZE.

○...KNOWN CORNER.

⊙...REFERENCED CORNER
BY WEYERHAEUSER
METHOD.

In 1940 John Woodard and Chester Gilham were at this corner. They set a red cedar post from the Fir BT which was a snag and in poor condition. They remembered the tree was small and suppressed in growth by a 36" Red Cedar tree which was growing next to and around the base of the Fir BT showing old scribe marks. They put their cruiser marks on the East side of this cedar tree. The alder BT was gone. February 22, 1963 I took John Woodard and Chester Gilham to this Corner and they pointed out the hole at the base of a 42" Red Cedar snag with their cruiser marks on it. The cedar post was recovered from beneath the debris.

I, J. F. Woodard being first duly sworn depose and say that I was logging engineer and surveyor for the W. A. Woodard Lumber Co. for the years of 1935 to 1956 and that during the course of my work in the early forties I in company with C. C. Gilham located the West $\frac{1}{4}$ corner of Section 14, Township 22 South, Range 4 West and found the witness tree for Section 15 being a fir snag 8 inches in diameter which still showed the scribing. This snag stood against the roots of 40 inch cedar on the South side of same. Mr. Gilham and I placed a cedar stake 4 ft. long and 3 $\frac{1}{2}$ inches in diameter 4 links South 35° East from this 8" snag.

During December 1952 Mr. E. Albin under my direction transit ran the West boundary of said Section 14 for logging purposes and placed an aluminum GLO card on the 40" cedar 4 $\frac{1}{2}$ feet from said $\frac{1}{4}$ corner.

On Feb. 22, 1963 in company of Bob Barta and C. C. Gilham I identified the point referred to above. The witness snag had been pulled out in logging, but I found the cedar stake and aluminum GLO card intact and also could easily see the hole where the witness snag had stood.

At this time, Bob Barta for Weyerhaeuser placed a 1" aluminum pipe at the proper location of the corner as reconstructed by me and referenced the corner in their usual manner.

J. F. Woodard
I agree that the statements above are factual and correct.

STATE OF OREGON, County of Lane, ss.

Personally appeared the above named J. F. Woodard and C. C. Gilham and acknowledged the foregoing instrument to be their voluntary act and deed. Before me:

Dated February 28 A.D. 1963
My Commission Expires November 30, 1965

[Signature]
Notary Public for Oregon

I, J. F. Woodard being first duly sworn depose and say that I was logging engineer and surveyor for the W. A. Woodard Lumber Co. for the years of 1935 to 1956 and that during the course of my work in the early forties I, in company with C. C. Gilham located the West ¼ corner of Section 14, Township 22 South, Range 4 West and found the witness tree for Section 15 being a fir snag 8 inches in diameter which still showed the scribing. This snag stood against the roots of 40 inch cedar on the South side of same. Mr. Gilham and I placed a cedar stake 4 ft. long and 3½ inches in diameter 4 links South 35° East from this 8" snag.

During December 1952 Mr. E. Albin under my direction transit ran the West boundary of said Section 14 for logging purposes and placed an aluminum GLO card on the 40" cedar 4¼ feet from said ¼ corner.

On Feb. 22, 1963 in company of Bob Barta and C. C. Gilham I identified the point referred to above. The witness snag had been pulled out in logging, but I found the cedar stake and aluminum GLO card intact and also could easily see the hole where the witness snag had stood.

At this time, Bob Barta for Weyerhaeuser placed a 1" aluminum pipe at the proper location of the corner as reconstructed by me and referenced the corner in their usual manner.

I agree that the statements above are factual and correct.

C. C. Gilham

J. F. Woodard

STATE OF OREGON, County of Lane, ss.

Personally appeared the above named J. F. Woodard and C. C. Gilham and acknowledged the foregoing instrument to be their voluntary act and deed. Before me:

Dated February 28 A.D. 1963
My Commission Expires November 30, 1965

Leah J. Calder
Notary Public for Oregon