


# PUBLIC LAND CORNERS

**WEYERHAEUSER TIMBER COMPANY  
SPRINGFIELD BRANCH**

TOWNSHIP 23 S RANGE 2 W  
SECTION 11 CORNER NE  
COUNTY Douglas OREGON

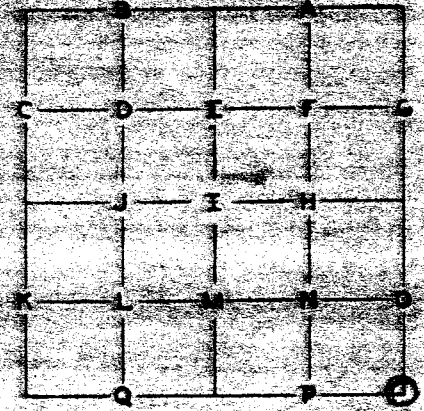

**GLO SURVEY RECORD**

DATE: August 1894

CORNER 15" x 12" x 5" BASALT STONE

**PRESENT CONDITION - (DESCRIBE FULLY - USE PAGE 2 IF NEEDED FOR EXPLANATION)**

GONE. A DEEP GULLY SKID ROAD AT POINT 1 & 2 CORNER

**ACCESSORIES:**

	BEARING-	LINKS-	FEET-
24" FIR	N 27° E	26	17.2
30" FIR	S 10° E	37	24.7
36" FIR	S 65° W	31	20.5
36" FIR	N 15° W	30	19.8

STUMP - NO SCRIBING - SEE W.T. 1953 REFERENCE

W.T. Co                      SURVEY RECORD  
JOB ERM DATE: 1893

**PRESENT CONDITION:**

36" FIR	N 11° W 19.9	PLATE W. NAIL	(ORIGINAL PLY SCREWS PRESENT)
36" FIR	S 77° W 18.2	PLATE & W. NAIL	
32" FIR	EAST 26.4	" " " "	
30" FIR	S 45° E 27.8	" " " "	

NOW A STUMP - PLATE GONE, NAIL GONE

NOW A STUMP - NO WRITING ON PLATE

NOW A STUMP - PLATE GONE

NOW A STUMP - NO WRITING ON PLATE.

CORNER SET: 3/4" x 3/4" MCEL PIPE

MAGNETIC DECLINATION: 20° E

2" x 10' BLACK IRON PIPE SET IN PLACE AT POINT

**BEARING AND DISTANCE TO ABOVE IDENTIFIED SURVEY ACCESSORIES:**

BEARING-	FEET-	SURVEY -
SEE ACCESSORIES	ADDED 1915	DATE

CS 53/106-T

ACCESSORIES ADDED THIS DATE.

MAGNETIC DEVIATION 20°E

TREES OR STUMPS SHOWN BELOW ARE THE SAME AS W.T. REFERENCES OF 1953

	BEARING	FEET	ORIG. B.T.	"W" NAIL	PLATE	BRA. DIS.
24" FIR STUMP	N 18° W	17.0	X	X	X	
38" FIR STUMP	S 73° W	18.1		X	X	
34" FIR STUMP	EAST	27.1		X	X	
34" FIR STUMP	S 42° E	38.8		X	X	

IDENTIFIED ON PHOTO:

INFORMATION ON LOCATION OF CORNER AS NOW SET:

GROUND COVER: COARSE CORNER IN EAST SIDE OF A DEEP CAT SKI RACE

(USING FORM LINES SKETCH TOPOG AT CORNER ON PAGE 2 PLAT)

SLOPE FACES (GIVE BEARING IN DEGREES) SOUTH ON MINUS (-) 25 %

NORTH: 7

SOUTH: 157 100 W. feet. dense track of trees

EAST: 137 100 E. feet. small trees

WEST: 152

FROM CORNER -

WORK DONE FOR W.T. CO

*margin & etc*

FIELD NOTES IN BOOK

BY ENGINEER

DATE 11/1/54

UNDER THE SUPERVISION OF

ASSISTED BY CHARLIE ELDRIDGE

COPIES SENT TO

SEAL

53/106

PAGE 3