

Renewal

9/10  
16/15

T33S R7W

Found

OBTS

12" Laurel / NW 1/4 N50E 9E  
opened for scribe "BT"

16" D. Fir NW 1/4 S10W 18E  
No marks visible

No trace of SF or NW BTs

Renewal

Set Brass cap at sec cor MKD

County Surveyors office

Doug. Co  
T33S R7W

S9 / S10  
S16 / S15

Jas. Co

1968

New Bearing Trees

14" D. Fir N 78 1/2 W 16E  
Scribed T33S R7W S9 CS BT

15" D. Fir N 53 E 17E  
Scribed T33S R7W S10 CS BT

7" B. Oak S 8 1/2 E 28E  
Scribed T33S R7W S15 CS BT

Reblazed & Rescribed

52" D. Fir S10W 18E  
Scribed T33S R7W S16 CS BT

J. J. Co  
~~1968~~  
~~1968~~  
~~1968~~

310

O.K. J.W.P.

OVER

C.S. File No. 54/36-147

DIETZGEN NO. 305-6

Also Found

44" D. Fir Facing SW from  
cor? Bark scribe faint CC T3 R7W

28 D. Fir Facing West from  
cor. Scribed in wood "S" visible

This tree opened -

Scribe quite old.

This cor approx 250-300 ft  
North of ~~9/16~~

9-3-68

*JMG*

No record - See letter from  
Gurpel in file.

**FILED**

**RECEIVED**

**APR 2 1968**

**COUNTY SURVEYOR  
DOUGLAS COUNTY, ORE.**



UNITED STATES  
DEPARTMENT OF THE INTERIOR

IN REPLY REFER TO:

9180 (100.4c)

BUREAU OF LAND MANAGEMENT  
Oregon State Office  
729 N. E. Oregon (P. O. Box 2965)  
Portland, Oregon 97208

April 16, 1968

Mr. James W. Byron  
Douglas County Surveyor  
Roseburg, Oregon 97470

Dear Mr. Byron:


I apologize for the delay in answering your letter concerning the field note record of the corner of sections 9, 10, 15, and 16, T. 33 S., R. 7 W., Willamette Meridian, Oregon.

A perusal of our records indicates that this corner is a common corner originally established by Wm. H. Byars in 1882, and rehabilitated by Oscar F. Thiel in 1901. Thiel remonumented the original corner point with a fir post, 3 ft. 4 ins. sq., 24 ins. in the ground, which he states was witnessed as described by the Surveyor General.

As far as we can determine no closing corner has ever been established in this area. The line north from the corner was run by Byars and no mention of any other corner is made. According to our record the corner of sections 9, 10, 15, and 16 is a common corner.

I hope this helps to clarify your records.

Sincerely yours,

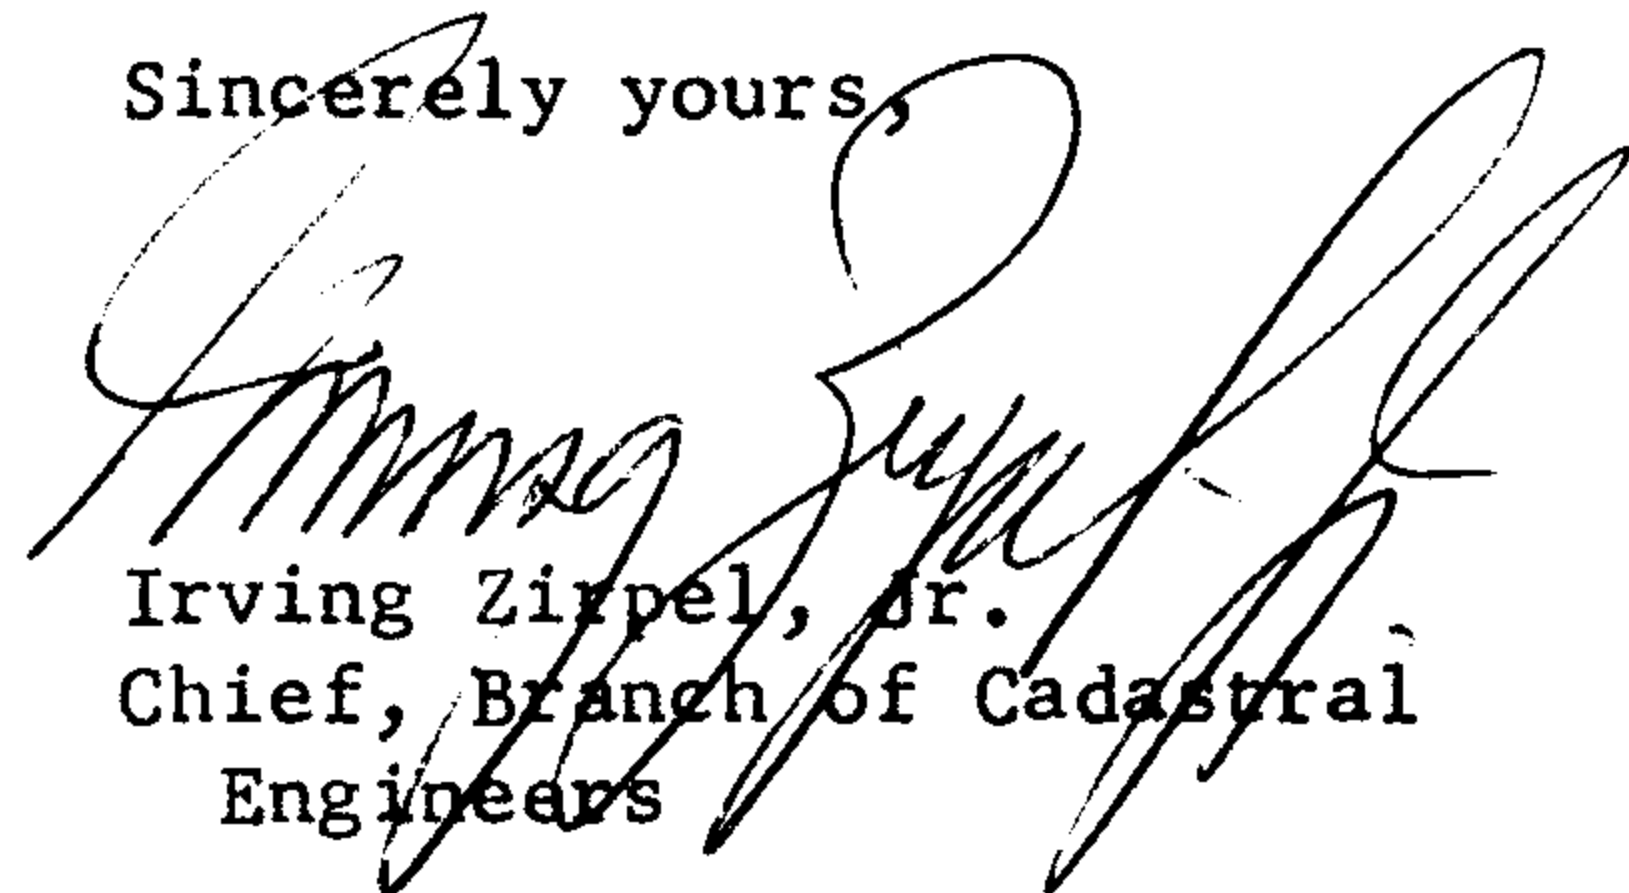

Irving Zippel, Jr.  
Chief, Branch of Cadastral  
Engineers

REC'D

REC'D

APR 17 1968

COUNTY ENGINEER  
DOUGLAS COUNTY, OREGON

C. S. File No. 54/36-167

April 4, 1968

Bureau of Land Management  
Mr. Irving Zirpel, Jr.  
P. O. Box 3861  
Portland, Oregon 97208

Dear Mr. Zirpel:

We have a field crew renewing corners in Township 33 South, Range 7 West, W. M. We find Byar's corner for section 9, 10, 15 and 16 and renew same. Also find two bearing trees marked for the closing corner for sections 9 and 16 about 250 feet north of section corner 9, 10, 15 and 16. A 44" Fir faces to the southwest and shows faint bark scribing "CC T3 R7W" and a 28" Fir faces to the west and scribed in wood "S" visible. Scribing seems to be very old. This corner has been used for a cutting corner in the northeast  $\frac{1}{4}$  of section 16. Our records show that Theil called for a common corner in 1900. Also Byars called it common in 1883. We would appreciate your office checking this information and should you find additional notes, will you please send them to this office so our records will be complete.

Yours truly,

James W. Byron  
County Surveyor

JWB/11