

SOPLY

SOUTHERN OREGON PLYWOOD, INC.

Manufacturers of Quality Plywood

P.O. Box 269, GRANTS PASS, OREGON 97526 TELEPHONE 503 476-6681



July 31, 1968

Douglas County Surveyor
Douglas County Courthouse
Roseburg, Oregon

Dear Sir:


The SE Section corner of Section 34, T32S, R4W was a stone which has been destroyed by a cat fire trail on a BLM timber sale. I replaced the corner as follows:

Set 1" x 30" iron pipe; left 10" above ground level. Used compass and steel tape. Two original bearing trees remain.
24" Douglas Fir bears 96 lks dist.
30" Douglas Fir bears 50 lks dist.

Very truly yours,

SOUTHERN OREGON PLYWOOD, INC.

Lorne Swearingen
Lorne Swearingen, Timber Mgr.

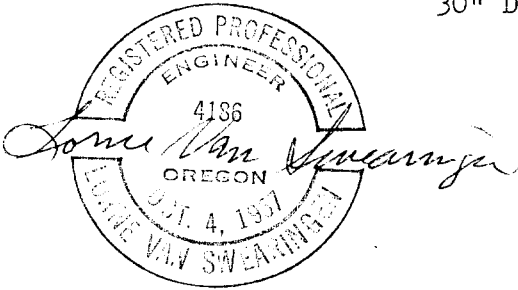

LS/gm

FILED
RECEIVED

1968
COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

C. S. File No. 55/85

#101

-T33-4

SOPLY

SOUTHERN OREGON PLYWOOD, Inc.

Manufacturers of Quality Plywood

P.O. Box 269, GRANTS PASS, OREGON 97526 TELEPHONE 503 476-6681



October 30, 1969

FILED
RECEIVED

OCT 31 1969

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

Douglas County Surveyor
Douglas County Courthouse
Roseburg, Oregon


Dear Sir:

It was necessary to fall a dangerous bearing tree on a road construction project with the BLM on Cedar Springs Sale #14-11-0008-11-406. I found the following evidence of the corner to be a brass cap marked:

T32S	T32S	
S24	S18	CC
R4W	S19	
	R3W	

1959

The bearing tree for Section 18 was in good shape and the bearing tree for Section 19 was fell with stump remaining on a very high cut bank of new road construction. Because of the very high cut bank and the inaccessability of reasonably close bearing trees, and the fact that there will be a possibility of a future timber sale in Section 19, I scribed the following bearing tree as follows: A 7" Hemlock S38degrees W 21.1 feet distance T32S R4W S24.

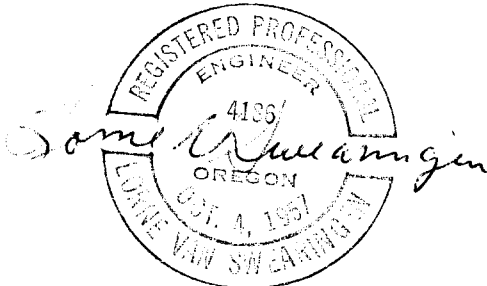

Sincerely,

SOUTHERN OREGON PLYWOOD, INC.

Lorne Swearingen

Lorne Swearingen, Tbr. Mgr.

LS:ts

0-109 - T32-4

0-133 - T32-3

C. S. File No. 55/85