

RESTORED CORNER FOR STATE OF OREGON--DEPARTMENT OF FORESTRY

Section corner common to Sections 24 and 25 (West End), T22S, R12W, W.M., Douglas County, Oregon.

ORIGINAL

20" x 16" x 12" Sandstone 15" in ground (missing) from which a:
8" Cedar bears N45 $\frac{1}{4}$ E 53 lks.; now 17", in place, partially closed face, scribes $\frac{1}{4}$ S2 visible.
16" Spruce bears S77E 50 lks.; missing.

RESTORED

Set 1 $\frac{1}{2}$ " x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY S26 T22S S24 S25 R12W 1969 RS 359", 34 inches in ground, and from which a:
17" Cedar (original) bears N45 $\frac{1}{4}$ E 34.98 ft.; scribed RS 359.
6' x 15' Rockface bears S75 $\frac{1}{2}$ E 28.9 ft to 6" X; scribed XBO.
Top of Spur Ridge, course N & S, bears S75 $\frac{1}{2}$ E 38.9 ft.


Set 4" x 4" x 72" white painted Cedar post 1.0 ft. SE of corner pipe. Oregon State Forestry Department metal location poster on original Cedar N45 $\frac{1}{4}$ E.

Dated July 16, 1969.

Restored by Lloyd D. Smith under my direction.
Lloyd D. Smith, Transitman



Present and witnessed by Charles W. Cook.

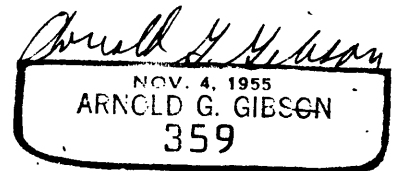

FILED
RECEIVED

SEP 9 1969

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE

3
#60