

REWITNESSED CORNER FOR STATE OF OREGON-DEPARTMENT OF FORESTRY

One quarter corner common to Sections 4 and 5, T22S, R11W, W.M., Douglas County, Oregon.

ORIGINAL

Bluff of rock 15' x 4' with cross (x) at exact Cor. Point (Bluff in place $\frac{1}{4}$ S visible) from which a:

- 8" Spruce bears S88°W 27 lks.; now 24" rotted stump, backcast of S4 S visible.
- 24" Fir bears S01°E 46 lks.; now 57", face grown over, in place.

REWITNESSED


Chiseled 4" X on original rock bluff at exact cor. point from which a:

- 15" Fir bears S02 $\frac{1}{4}$ °W 25.0 ft. to face; scribed $\frac{1}{4}$ S5 BT.
- 20" Fir bears N17 $\frac{1}{2}$ °E 49.9 ft. to face; scribed $\frac{1}{4}$ S4 BT RS 359.

Set 4" x 4" x 72" white painted Cedar post 2.2 ft. West of corner stone. Oregon State Forestry Department metal location poster on 15" Fir S02 $\frac{1}{4}$ °W 25.0 ft.

Dated November 18, 1970

Restored by Charles W. Cook under my direction.
Charles W. Cook, Transitman

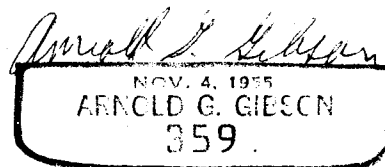

Present and witnessed by David R. Brown
Dale E. Redding

FILED
RECEIVED

DEC 18 1970

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

#90 ✓