

RESTORED CORNER FOR STATE OF OREGON--DEPARTMENT OF FORESTRY

Angle Point corner for Section 2 (original section corner 1 and 2), T23S, R11W, W.M., Coos and Douglas Counties, Oregon.

ORIGINAL

Stone (missing) from which a:

- 50" Dead Fir bears N67°W 40 lks.; now 27" x 10' high rotted fir stub, in place.
- 50" Dead Fir bears S77°E 72 lks.; now in place, scribes R11W remaining.
- 4" Alder bears S81°W 68 lks.; missing.

RESTORED


Set 1 1/2" x 36" galvanized iron pipe with 3" bronze cap marked "OREGON STATE BOARD OF FORESTRY S2 T23S R11W AP 1971 RS 359", 35 inches in ground, and from which a:

- 35" Fir bears S70 1/4°W 19.6 ft. to face; scribed T23S R11W S2 AP BT.
- 28" Fir bears S 57 3/4°E 27.1 ft. to face; scribed T23S R11W S2 AP BT RS 359.

Set 4" x 4" x 72" white painted Cedar post 3.5 ft. S76°W of corner pipe. Oregon State Forestry Department metal location poster on 35" Fir BT S70 1/4°W 19.6 ft.

Dated May 30, 1972

Restored by Charles W. Cook under my direction.
Charles W. Cook, Engineer

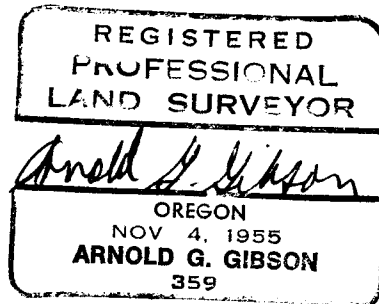

Present and witnessed by Kenneth L. Graham
Mark E. Cook

FILED
RECEIVED

AUG 16 1972

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

#126 - T22-112