

PUBLIC LAND CORNERS

FILED
RECEIVED


WEYERHAEUSER COMPANY JUN 3 1981

SPRINGFIELD BRANCH COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

TOWNSHIP 23S RANGE 4W

SECTION 12 CORNER CN1/16 "E"

COUNTY Douglas OREGON

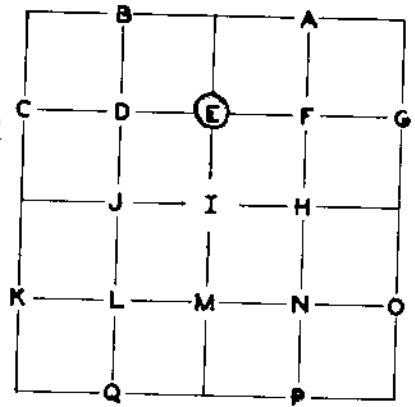

GLO SURVEY RECORD

DATE: _____
CORNER Not set by GLO

PRESENT CONDITION - (DESCRIBE FULLY -
USE PAGE 2 IF NEEDED FOR EXPLANATION.)

ACCESSORIES:

BEARING-	LINKS-	FEET-

W. N. Haines SURVEY RECORD
DATE: Nov. 1963

PRESENT CONDITION:

Transit Survey
Set "T" iron and scribed:

Found "T" iron in place

32" Red Cedar S72E 4.3'

34" Red Cedar scribing visible

(^HHaines scribed only 1 BT)

CORNER SET: "T" iron as set by Haines' Survey

MAG. DECL.: 20°

BEARING AND DISTANCE TO ABOVE IDENTIFIED SURVEY ACCESSORIES:

BEARING-	FEET-	SURVEY -	
<u>S70E</u>	<u>2.9</u>	<u>Haines '63</u>	<u>to scribed face (Haines' 4.3' is to center of tree)</u>

ACCESSORIES ADDED THIS DATE:

MAGNETIC DECLINATION 20°

	BEARING	FEET	ORIG. B.T.	"W" NAIL	PLATE	BRASS DISC
34" Red Cedar	S71E	2.5	Haines 1963	X	X	
10" Douglas Fir	N22E	14.3	--	X	X	

IDENTIFIED ON PHOTO:

INFORMATION ON LOCATION OF CORNER AS NOW SET:

GROUND COVER: 15-20 year fir reproduction and brush

(USING FORM LINES SKETCH TOPOG AT CORNER ON PAGE 2 PLAT)

SLOPE FACES (GIVE BEARING IN DEGREES) West ON MINUS (-) 14 %

NORTH: Level

SOUTH: -5%

EAST: +20%

WEST: -14%

FROM CORNER |

FILED
RECEIVED

JUN 3 1981

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

WORK DONE FOR W. CO.

FIELD NOTES IN BOOK: _____

BY: Glen McChesney
ENGINEER - SURVEYOR

DATE: 8/8/68

UNDER THE SUPERVISION OF:

ASSISTED BY: _____

COPIES SENT TO: _____

SEAL

C. S. File No. 58/B

PAGE 3

36	31	32	33	34	35	36	31
1	6	5	4	3	2	1	6
12	7	8	9	10	11	12	7
13	18	17	16	15	14	13	18
24	19	20	21	22	23	24	19
25	30	29	28	27	26	25	30
36	31	32	33	34	35	36	31
1	6	5	4	3	2	1	6

WEYERHAEUSER COMPANY

CORNER REFERENCE METHOD CONSISTS OF:

A "W" NAIL DRIVEN THRU THE HOLE IN A BRASS DISC, INTO A NOTCH CUT LOW ON A TREE, STAMPED WITH THE OREGON REGISTERED LAND SURVEYOR OR PROFESSIONAL ENGINEER REGISTRATION NUMBER.

AN EMBOSSED ALUMINUM PLATE, NAILED HEAD HIGH ON SAME TREE WITH 8D ALUMINUM NAILS, WITH DISTANCE AND BEARING FROM THE "W" NAIL TO THE CORNER STAMPED ON IT.

