M 96-20

FILED
RECEIVED BS

MAR 22 1984

COUNTY SURVEYOR
DOUGLAS COUNTY, ORE.

OREGON CORNER RESTORATION FORM

Section 26 Township 20S Range 9W

County Douglas Date 3-05-84

Corner Designation

East 1/16 Corner
Section 26

26
—
35

___Condition Report Only
___Not Found
___Renewed
___Unrecorded
x Surveyed In
___Referenced Out

Previous Renewals/Surveys, etc. None

Monument(s) & Accessories Found: (Condition and Source)

Monument Detail

T20S R9W
S26
E1/16 + COR
S35
1984
P.L.S. 1039

Sketch

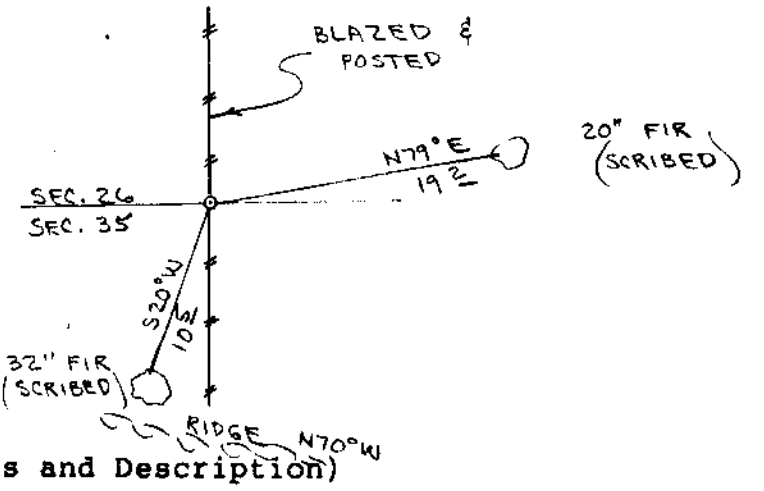

Monument Set (Procedures and Description)

Set 2" x 36" Aluminum pipe and cap. Cap stamped S-T-R, date and P.L.S. No. 1039. Buried purple magnetic marker under 36" pipe. See filed survey for survey procedures.

New Accessories

20" Fir, N79E, 19.2' (Scribed/Painted Red/Brass Washer)
32" Fir, S20W, 10.5' (Scribed/Painted Red/Brass Washer)
Set metal fence post, with land survey monument sign wired to, beside aluminum pipe.

Location & Comments

Corner lies on North slope about 80 feet North of ridge. Ridge bears N70W & S70E. Corner lies in 100-120 year old green timber.

Compass Declination 20½
Firm/Agency Roberts Surveying Inc.
Address 29 West 29th St.
Eugene, Oregon 97405
Party Chief Ted Baker
Notes Stu Duce
Witness Buzz Moisan

Surveyor's Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Lee Roberts
OREGON
AUGUST 22, 1975
L. D. ROBERTS
1039

C.S. File No. 58/280 (N)