FILED

Date: 11-28-95 By: MP

This survey consists of:

Map: ____

Narrative: ____

Corner Rpt: C.S. 65/1-4

DOUGLAS COUNTY
SURVEYOR

OREGON CORNER RESTORATION FORM

Section 25 Township 24S Range 3W

County Douglas Date 10/18/95

Corner Designation

25/36 1/4 Corner

___ Condition Report Only
___ Not Found
X Renewed
___ Unrecorded
___ Surveyed In
___ Referenced Out

Previous Renewals/Surveys, etc.

Weyerhaeuser Company 1960 Renewal #21

Monument(s) & Accessories Found: (Condition and Source)

5/8" Monel pipe
40" Fir Stump S 29 E 28.7' to "W" nail
Record: S 32 E 28.7' to "W" nail
43" Fir Stump N 30 E 42.2' to "W" nail
Record: N 30 E 42.2' to "W" nail
16" Fir stump N 32 E 16.3' to "W" nail
Record: Weyerhaeuser Co. 1956 N 40 E 13.6 ft to "W" nail

Monument Detail



Sketch

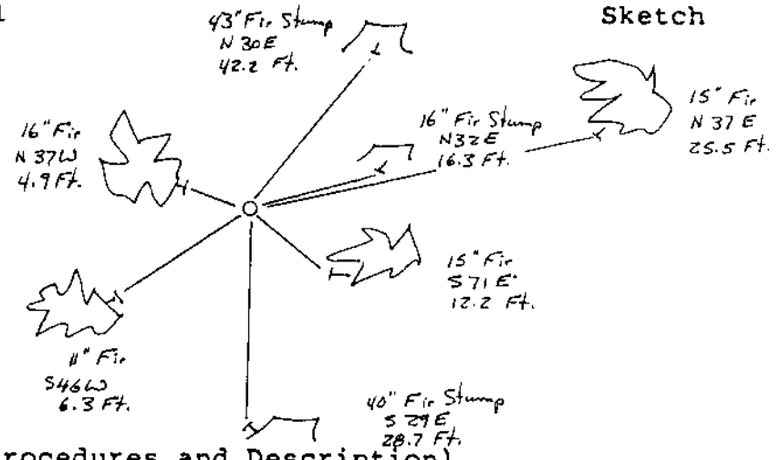

Monument Set (Procedures and Description)

Replaced pipe with 2"x 32" Tson Pipe with brass cap dated 1995. Set metal fence post 1 Ft. west.

New Accessories

16" Fir N 37 W 4.9' to "W" nail
11" Fir S 46 W 6.3' to "W" nail
15" Fir S 71 E 12.2' to "W" nail
15" Fir N 37 E 25.5' to "W" nail

Location & Comments

Compass Declination 20°E

Surveyor's Seal

Firm/Agency Baker & Assoc. Surveyors

Address 1385 Oak St. Ste 3 Eugene OR

Party Chief Pat Irvin

Notes ____

Witness Spencer Noland

REGISTERED PROFESSIONAL LAND SURVEYOR
OREGON
JULY 16, 1982
DANIEL W. BAKER
1978

Expires 12/31/95

C.S. File No. 65/1-4

Ren # 133