FILED

Date: 11-13-2003 By: JC

This survey consists of:

Map: _____

Narrative: _____

Corner Rpt: 65/48-38

DOUGLAS COUNTY SURVEYOR

OREGON CORNER RESTORATION FORM

Section 6 Township 23S Range 6W

County DOUGLAS Date 10/22/03

Corner Designation

1/4

S6 | S5

___ Condition Report Only
___ Not Found
✓ Renewed
___ Unrecorded
___ Surveyed In
___ Referenced Out

Previous Renewals/Surveys, etc.

WIFORD HAINES 1954-1955 SURVEY CS FILE 42/13 (MAP 112-74)

BLM RESURVEY 1943/1957 (DCSO RECORDS VOL. 30 PAGE 12716)

Monument(s) & Accessories Found: (Condition and Source)

FOUND 1955 GLO BRASS CAP

-- WITNESS BRASS CAP MARKED 1/4 S5 RM 1955 WITH ARROW POINTING TOWARD TRUE CORNER BEARS S89 1/4° E 32.7 FT. (RECORD EAST 33.0 FT)

-- WITNESS BRASS CAP MARKED 1/4 S6 RM 1955 WITH ARROW POINTING TOWARD TRUE CORNER BEARS S88 1/4° W 33.0 FT (RECORD WEST 33.0 FT)

-- HAINES "T" IRON BEAR N16°W 6.6 FEET

-- 53" DOUGLAS FIR FOR HAINES CORNER BEARS N85 1/4° W 188.3 FT.

-- 33" DOUGLAS FIR FOR HAINES CORNER BEARS N61 1/4° W 144.3 FT

Monument Detail

1/4

S6 | S5

1955

Sketch

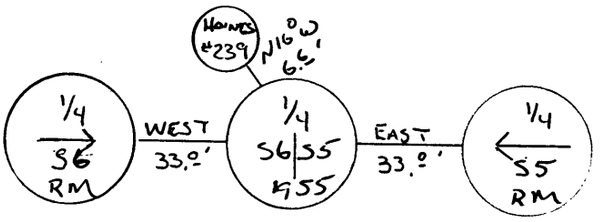

Monument Set (Procedures and Description)

New Accessories

Location & Comments

GLO BRASS CAP 1.0 FT ABOVE GROUND ON 25% WEST FACING SLOPE. A ROAD LANDING BEARS S85°W 200 FT.

Compass Declination 19 1/2

Firm/Agency LONE ROCK TIMBER COMPANY

Address P.O. BOX 1127 ROSEBURG, OR. 97470

Party Chief KEN HOFFINE

Notes _____

Witness _____

Surveyor's Seal

REGISTERED PROFESSIONAL LAND SURVEYOR

Ken W Hoffine

OREGON JULY 16, 1987 KEN W. HOFFINE 2291

6-30-05

C.S. File No 65/48-38