


CORNER NOTES

January 22, 2009

BY: HOSTETTER LAND SURVEYING
63538 PINTAIL DR.
COOS BAY, OR 97420

FOR: PLUM CREEK
634598 OLIVE BARBER RD.
COOS BAY, OR 97420

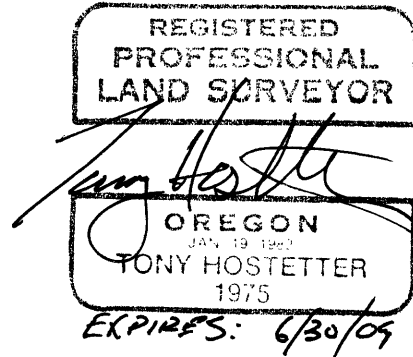

**AP ON SOUTH LINE OF SECTION 34, T. 31 S., R.09 W.,
W.M. (424100)**
DOUGLAS COUNTY, OREGON

FOUND: 1917 GLO BRASS CAP AS DESCRIBED BY MENSCH
AND SORRELS (VOL. 29, PGS 12190).

FROM WHICH:

60" FIR STUMP, FACE EVIDENT, BLM TAG,
BEARS; N61°E, 30.4 FEET TO CENTER.

24" FIR SNAG, NO MARKS,
BT MARKED BY MENSCH IN 1917
BEARS; S76°W, 16.5 FEET TO CENTER.

NEW BTS:

16" FIR, SCRIBED "S34 AP BT", BT TAG,
BEARS: N03°E, 42.4 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

14" FIR, SCRIBED "S34 AP BT", BT TAG,
BEARS: S73°E, 3.3 FEET TO 20D SPIKE PLACED IN ROOT COLLAR BELOW
SCRIBING.

18" FIR, SCRIBED "S34 AP BT", BT TAG,
BEARS: S01°E, 13.4 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

16" FIR, SCRIBED "S34 AP BT", BT TAG,
BEARS: N14°W, 37.8 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

FILED
Date: 2/27/2009 By: X
This survey consists of:
Map: _____
Narrative: _____
Corner rpt: CS: 65/66-13
DOUGLAS COUNTY
SURVEYOR

C.S. File No 65/66-13