

FILED

Date: 2/27/2009 By: JC

This survey consists of:

Map: _____

Narrative: _____

Corner Rpt: 65/66-14

DOUGLAS COUNTY
SURVEYOR

CORNER NOTES

January 22, 2009

BY: HOSTETTER LAND SURVEYING
63538 PINTAIL DR.
COOS BAY, OR 97420

FOR: PLUM CREEK
634598 OLIVE BARBER RD.
COOS BAY, OR 97420

SW CORNER, SECTION 34, T. 31 S., R.09 W., W.M.
DOUGLAS COUNTY, OREGON

FOUND: 35" FIR, FACE EVIDENT, BLM TAG,
ORIGINAL BEARING TREE MARKED BY BYARS
IN 1900 AND REMARKED BY POWELL IN
1967 (C S FILE 54/32).
THE MONUMENT AND THE OTHER BT ARE GONE.

SET: 5/8" X 36" REBAR WITH PLASTIC CAP, MARKED
"HOSTETTER LS 1975" AT RECORD BEARING AND
DISTANCE FROM THE 35" FIR BT.

FROM WHICH:


NEW BTS:

7" FIR, SCRIBED "S34 SW BT", BT TAG,
BEARS: S18°E, 4.0 FEET TO 20D SPIKE PLACED IN ROOT COLLAR BELOW
SCRIBING.

9" FIR, SCRIBED "S33 SE BT", BT TAG,
BEARS: S28°W, 14.0 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

7" FIR, SCRIBED "S33 SW BT", BT TAG,
BEARS: S77°W, 15.0 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

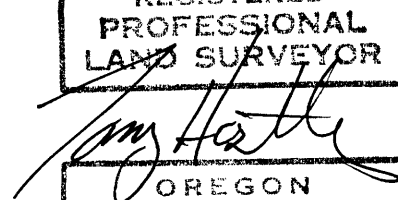

OREGON
JAN 19 1932
TONY HOSTETTER
1975

C.S. File No 65/66-14

EXPIRES: 6/30/09