

FILED

Date: 2/27/2009 By: JC

This survey consists of: _____

Map: _____

Narrative: _____

Corner Rpt: CS 65/66-16

DOUGLAS COUNTY
SURVEYOR

CORNER NOTES

January 22, 2009

BY: HOSTETTER LAND SURVEYING
63538 PINTAIL DR.
COOS BAY, OR 97420

FOR: PLUM CREEK
634598 OLIVE BARBER RD.
COOS BAY, OR 97420

NW CORNER, SECTION 3, T. 32 S., R.09 W., W.M.
DOUGLAS COUNTY, OREGON

FOUND: 1917 GLO BRASS CAP AS DESCRIBED BY MENSCH
AND SORRELS (VOL. 29, PGS 12190-91).

FROM WHICH:



8" FIR, BLM TAG, NO OTHER MARKS,
BT MARKED BY POWELL IN 1967
(CS FILE 54/32),
BEARS; N37°W, 37.6 FEET TO CENTER.

NEW BTS:

12" FIR, SCRIBED "S3 NW BT", BT TAG,
BEARS: N27°E, 3.9 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

4" FIR, SCRIBED "S4 NE BT", BT TAG,
BEARS: S73°W, 2.3 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

16" FIR, SCRIBED "S33 SW BT", BT TAG,
BEARS: N37°W, 37.6 FEET TO 20D SPIKE PLACED IN ROOT COLLAR
BELOW SCRIBING.

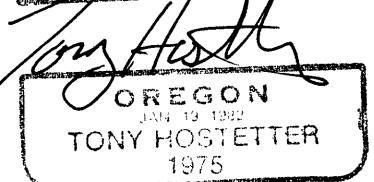

EXPIRES: 6/30/09

C.S. File No 65/66-16