

# CORNER NOTES

MARCH 2011

BY: TONY HOSTETTER  
63538 PINTAIL DR.  
COOS BAY, OR 97420

FOR: WEYERHAEUSER COMPANY  
98674 DELLWOOD LANE  
COOS BAY, OR 97420

**NW CORNER, SECTION 14, T.24 S., R.9 W., W.M.**  
DOUGLAS COUNTY, OREGON

FOUND: 1968 DOUGAS COUNTY SURVEYORS OFFICE BRASS CAP.

FROM WHICH:

38" FIR STUMP, 1905 BT, WEYCO TAG,  
BEARS; N 48°E, 31.7 FEET

44" FIR STUMP, 1905 BT, NO MARKS,  
BEARS; S 42°W, 11.9 FEET

20" FIR STUMP, 1968 BT, DOUGLAS COUNTY TAG,  
BEARS; N 80°E, 43.6 FEET

NEW BTS:



12" FIR, WEYCO TAG,  
BEARS; NORTH, 20.8 FEET TO SPIKE IN ROOT COLLAR.

11" FIR, WEYCO TAG,  
BEARS; N 88°E, 39.6 FEET TO SPIKE IN ROOT COLLAR.

11" FIR, WEYCO TAG,  
BEARS; S 74°W, 9.4 FEET TO SPIKE IN ROOT COLLAR.

FILED  
Date: 4-6-2011 By: JC  
This survey consists of:  
Map: \_\_\_\_\_  
Narrative: \_\_\_\_\_  
Corner Rpt: CS 65/72-23

DOUGLAS COUNTY  
SURVEYOR

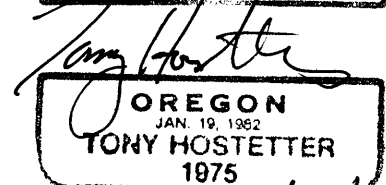

EXPIRES: 6/30/11

C.S. File No 65/72-23