

FILED

Date: 11-3-2015 By: X  
This survey consists of:  
Map: \_\_\_\_\_  
Narrative: \_\_\_\_\_  
Corner Rpt: CS65/87-46

**CORNER NOTES**

May 14, 2015

BY: TONY HOSTETTER  
63538 PINTAIL DR.  
COOS BAY, OR 97420

DOUGLAS COUNTY  
SURVEYOR

FOR: WEYERHAEUSER COMPANY  
98674 DELLWOOD LANE  
COOS BAY, OR 97420

**E 1/4 CORNER, SECTION 16, T.26 S., R.9 W., W.M.**  
DOUGLAS COUNTY, OREGON

FOUND: 28" HEMLOCK STUMP, SCRIBING VISIBLE, ( COOS COUNTY BOOK 10, PG. 180 ) 1963 RESTORATION BY ELLINGSEN.

SET: 5/8" X 36" IRON ROD W/ALUMINUM CAP MARKED "T26S R9W S15 S16 1/4 LS1975 2015"

FROM WHICH:

28" HEMLOCK STUMP, ELLINGSEN BT, DESCRIBED ABOVE,  
BEARS; N22°00'E, 25.3 FT TO CENTER. (RECORD BEARING AND DISTANCE ).

44" FIR STUMP, WEYCO TAG AND "W" NAIL,  
BEARS; S15°18'E, 21.8 FEET TO "W" NAIL (WEYCO RECORD: S15°E, 21.8')

NEW BTS:


13" FIR, SCRIBED "S15 1/4 BT", BT TAG,  
BEARS: N 17°15'E, 17.1 FEET TO SPIKE.

14" FIR, SCRIBED "S15 1/4 BT", BT TAG,  
BEARS: N86°04'E, 6.0 FEET TO SPIKE.

15" FIR, SCRIBED "S15 1/4 BT", BT TAG,  
BEARS: S33°54'E, 10.3 FEET TO SPIKE.

8" DOUBLE ALDER, SCRIBED "S16 1/4 BT", BT TAG,  
BEARS: S56°08'W, 14.4 FEET TO SPIKE.

W QU 15-26-9.DOC

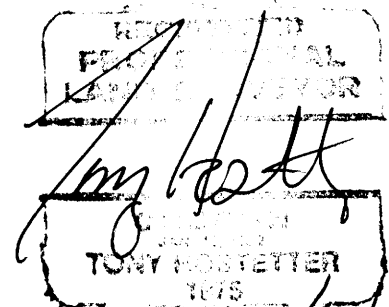

C.S. File No 65/87-46 EXPIRES: 6/30/17