

FILED

Date: 11-3-2015 By: TC

This survey consists of:

Map: \_\_\_\_\_

Narrative: \_\_\_\_\_

Corner Rpt: CS 65/89-47

# CORNER NOTES

May 27, 2015

BY: TONY HOSTETTER  
63538 PINTAIL DR.  
COOS BAY, OR 97420

DOUGLAS COUNTY  
SURVEYOR

FOR: WEYERHAEUSER COMPANY  
98674 DELLWOOD LANE  
COOS BAY, OR 97420

## SW CORNER SECTION 34, T.23 S., R.10 W., W.M. DOUGLAS COUNTY, OREGON

FOUND: 3/4" IRON PIPE, (NO EVIDENCE OF BOARD OF FORESTRY BRASS  
CAP AS DESCRIBED BY GIBSON, CS FILE 42/422).

FROM WHICH:

48" FIR STUMP, SCRIBING VISIBLE, WEYCO TAG, "W" NAIL,  
BEARS; N38°E, 29.6 FEET TO CENTER.

24" FIR STUMP, OSBF TAG, "W" NAIL,  
BEARS; S76°W, 24.2 FEET TO CENTER.

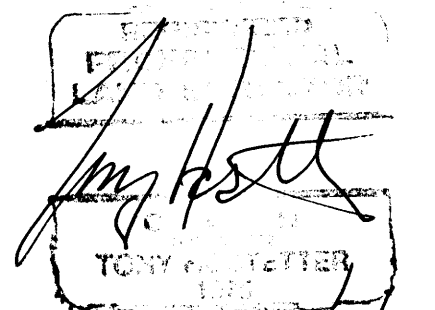
NEW BTS:

15" FIR, BT TAG,  
BEARS: N25°E, 7.8 FEET TO 6" SPIKE, PLACED BELOW TAG.

18" FIR, BT TAG,  
BEARS: S20°E, 12.6 FEET TO 6" SPIKE, PLACED BELOW TAG.

12" FIR, BT TAG,  
BEARS; N84°W, 26.2 FEET TO SPIKE, PLACED BELOW TAG.

SW 34-23-10.DOC

  
TONY HOSTETTER  
SURVEYOR  
EXPIRES: 5/30/17  
C.S. File No 65/89-47