

FILED

Date: 11-3-2015 By: JC

This survey consists of:

Map: \_\_\_\_\_

Narrative: \_\_\_\_\_

Corner Ppt: CS 65 / 89 - 50

# CORNER NOTES

June 9, 2015

BY: TONY HOSTETTER  
63538 PINTAIL DR.  
COOS BAY, OR 97420

DOUGLAS COUNTY  
SURVEYOR

FOR: WEYERHAEUSER COMPANY  
98674 DELLWOOD LANE  
COOS BAY, OR 97420

**S 1/4 CORNER, SECTION 33, T.25 S., R.8 W., W.M.**  
DOUGLAS COUNTY, OREGON

FOUND: 1968 DOUGLAS COUNTY SURVEYOR BRASS CAP AS DESCRIBED IN  
C S FILE 54/72.

FROM WHICH:

28" HEMLOCK STUMP, OBT, FAINT SCRIBING VISIBLE,  
BEARS; S15°E, 29.0 FEET TO CENTER.

ROTTEN HEMLOCK STUMP, BT TAG,  
BEARS; S60°W, 33.1 FEET TO CENTER.

32" HEMLOCK STUMP, NO VISIBLE EVIDENCE,  
BEARS; N29 1/2°E, 26.0 FEET TO CENTER.

NEW BTS:


19" FIR, BT TAG,  
BEARS: N 70°E, 9.0 FEET TO 6" SPIKE, PLACED BELOW TAG.

24" FIR, BT TAG,  
BEARS: S 15°E, 39.8 FEET TO 6" SPIKE, PLACED BELOW TAG.

16" FIR, BT TAG,  
BEARS: S 50°W, 4.7 FEET TO 6" SPIKE, PLACED BELOW TAG.

16" FIR, BT TAG,  
BEARS: N 08°W, 31.0 FEET TO 6" SPIKE, PLACED BELOW TAG.

S QU 33-25-8.DOC

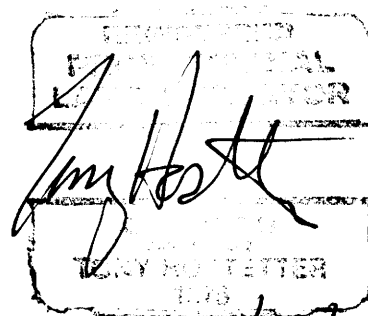

C.S. File No 65/89-50

EXPIRES: 6/30/17