

FILED

Date: 11/30/2015 By: SC

This survey consists of:

Map: \_\_\_\_\_

Narrative: \_\_\_\_\_

Corner Rpt: CS 65/89-59

**DOUGLAS COUNTY  
SURVEYOR**

# CORNER NOTES

September 15, 2015  
BY: TONY HOSTETTER  
63538 PINTAIL DR.  
COOS BAY, OR 97420  
FOR: WEYERHAEUSER COMPANY  
98674 DELLWOOD LANE  
COOS BAY, OR 97420

**SW CORNER, SECTION 30, T.24 S., R.9 W., W.M.  
GCDB/PLSS CORNER ID NO. 100200  
DOUGLAS COUNTY, OREGON**

FOUND: 1/2" COPPER PIPE, LISTED IN WEYRHAUSER COMPANY RECORDS AS BEING SET IN 1964 BASED ON THE FOUND ORIGINAL BEARING TREE LISTED BELOW.

FROM WHICH:  
40" FIR STUMP, OBT,, TAG AND "W" NAIL,  
BEARS; S60°W, 4.6 FEET TO CENTER.

36" FIR STUMP, WEYCO TAG AND "W" NAIL,  
BEARS; N 53°W, 46.7 FEET TO "W" NAIL.

Note: Weyerhaeuser bearings typically measured by staff compass.

NEW BTS:

14" FIR STUMP , BT TAG,  
BEARS: N 39°E, 9.4 FEET TO 6" SPIKE, PLACED BELOW TAG.


14" FIR STUMP, BT TAG,  
BEARS: S 49°E, 1.6 FEET TO 6" SPIKE, PLACED BELOW TAG

16" FIR STUMP, BT TAG,  
BEARS: N 54°W, 21.9 FEET TO 6" SPIKE, PLACED BELOW TAG

14" HEMLOCK STUMP, BT TAG,  
BEARS: N 20°W, 9.8 FEET TO 6" SPIKE, PLACED BELOW TAG

Note: New BT bearings determined by hand compass ( declination 18°)

SW 30-24-9.DOC

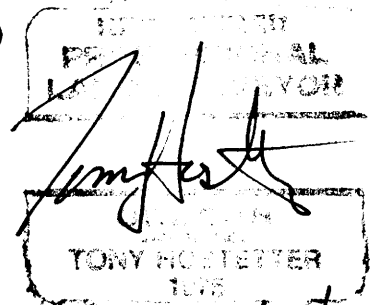

C.S. File No 65/89-59 EXPRESS: 6/30/17