

FILED

Date: 11-30-2015 By: JC
This survey consists of:
Map: _____
Narrative: _____
Corner Rpt: CS 65 | 89-61

CORNER NOTES

September 15, 2015

BY: TONY HOSTETTER
63538 PINTAIL DR.
COOS BAY, OR 97420

DOUGLAS COUNTY
SURVEYOR

FOR: WEYERHAEUSER COMPANY
98674 DELLWOOD LANE
COOS BAY, OR 97420

S 1/4 CORNER, SECTION 32, T.24 S., R.9 W., W.M.
GCBD/PLSS CORNER ID NO. 240100
DOUGLAS COUNTY, OREGON

FOUND: 3/4 IRON PIPE, LISTD IN WEYERHAEUSER COMPANY RECORDS AS BEING SET IN 1959 BASED ON THE FOUND ORIGINAL BEARING TREE LISTED BELOW.

FROM WHICH:

36" FIR STUMP, WEYCO TAG,
BEARS; S 76°W, 21.0 FEET TO CENTER.

Note: Weyerhaeuser bearings typically measured by staff compass.

NEW BTS:

14" HEMLOCK STUMP , BT TAG,
BEARS: N 11°E, 5.9 FEET TO 6" SPIKE, PLACED BELOW TAG.


18" FIR STUMP, BT TAG,
BEARS: N 21°E, 21.2 FEET TO 6" SPIKE, PLACED BELOW TAG

18" FIR STUMP, BT TAG,
BEARS: S 17°W, 4.1 FEET TO 6" SPIKE, PLACED BELOW TAG

12" FIR STUMP, BT TAG,
BEARS: N 57°W, 5.1 FEET TO 6" SPIKE, PLACED BELOW TAG

Note: new BT bearings determined by hand compass (declination 18°E)

S QU 32-24-9.DOC

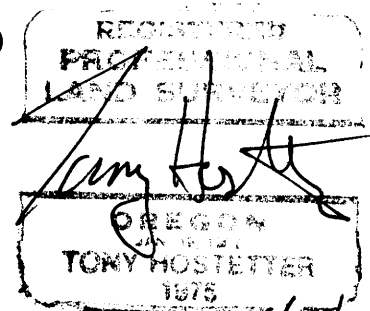

C.S. File No 65/89-61 EXPIRES: 6/30/17