

CORNER NOTES

February 13, 2020

BY: TONY HOSTETTER
63538 PINTAIL DR.
COOS BAY, OR 97420

FOR: WEYERHAEUSER COMPANY
63459 OLIVE BARBER RD.
COOS BAY, OR 97420

FILED
Date: 5/11/2020 By: SC
This survey consists of:
Map: _____
Narrative: _____
Corner Rpt: CS 65/106-9

DOUGLAS COUNTY
SURVEYOR

SW SECTION CORNER SECTION 17, T.24 S., R.9 W., W.M.
DOUGLAS COUNTY, OREGON PLSS 200400

FOUND: 1" IRON PIPE (NO RECORD)

12" HEMLOCK STUMP, WEYCO TAG, SCRIBING FOUND ON REMNENT
OF STUMP.

BEARS; N 86°E, 19.6 FEET TO CENTER (GLO RECORD: N 86°E, 19.1 FEET)

24" FIR STUMP, NO MARKS, POSSIBLE OBT,

BEARS; S 23°W, 31.4 FEET TO CENTER. (GLO RECORD: S 25°W, 30.4 FEET)

30" FIR STUMP, WECO TAG, POSSIBLE OBT,

BEARS; N 69°W, 32.6 FEET TO CENTER. (GLO RECORD: N 68°W, 32.3 FEET)

NEW BTS:

15" FIR TALL STUMP, BT TAG,

BEARS: N 86° E, 62.9 FEET TO 6" SPIKE, PLACED BELOW TAG.

20" FIR TALL STUMP, BT TAG,

BEARS: S 51°W, 24.2 FEET TO 6" SPIKE, PLACED BELOW TAG.


18" FIR TALL STUMP, BT TAG,

BEARS: N 68°W, 34.7 FEET TO 6" SPIKE, PLACED BELOW TAG.

15" FIR TALL STUMP, BT TAG,

BEARS: N 02°W, 41.4 FEET TO 6" SPIKE, PLACED BELOW TAG.

SW 17 24-9.DOX

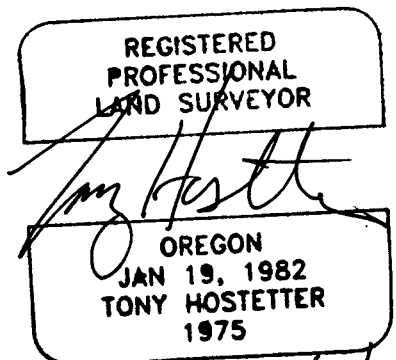

EXPIRES: 6/30/21
C.S. FILE 65/106-9