FILED

Date: 8-16-2005 By: X

This survey consists of:

Map:

Narrative:

Corner Rpt: 67/10-40

DOUGLAS COUNTY SURVEYOR

GOVERNMENT CORNER RESTORATION FORM

Township 29S Range 7W Sec. 8 County DOUGLAS

State OR Date 7-25-05 No. 240540

Corner Designation

CENTER 1/4 SEC. 8

___ Condition Report Only
___ Not Found
✓ Renewed
___ Unrecorded
___ Surveyed In
___ Referenced Out

Previous Renewals SET BY J. ARTMAN, DEC. 1990

MONUMENT DETAIL

Monument(s) Found: (Condition and Source)

5/8" I. ROD W/ YELLOW PLASTIC CAP MARKED "ARTMAN RLS 2268" 7" BELOW GROUND. (DEC. 1990)

Accessories Found:

30" NOW 37" PONDEROSA PINE NO SIGN OF BLAZE ON TREE, ALUM. TAG REPORTED BY ARTMAN NOT VISIBLE. B.T. TAG IN PLACE. TREE BEARS S 29½°E, 62 9/ FT. (REC. S 28°E, 63 3/ FT.) 1990 BT - THIS TREE IS TO BE REMOVED -

POWER POLE MARKED "TB-3" IL BEARS S 71°W, 33 3/ FT. (REC. S 73°W, 33 3/ FT.)

18" OAK (STILL 18" DIA.) IS MOST WESTERLY TREE IN 48" DIA. CLUSTER OF 4 TRUNKS NO SCRIBING OR HEALED BLAZES FOUND. ARTMANS ALUM TAG ON SIDE OF TREE IS VISIBLE. BT TAG IS ALSO NAILED TO THIS TRUNK. WHICH BEARS N 84½°E 111 3/ FT. BEARING IS TO CENTER OF ROOT CROWN & DIST. IS TO ALUM TAG ON SIDE OF TREE (REC. N86°E, 111 3/ FT) 1990 BT

NW COR OF CINDERBLOCK CHIMNEY BEARS S 19½°E, 104 1/ FT. (REC. S 18°E 104 1/ FT) 1990 BT - HOUSE & CHIMNEY TO BE REMOVED -

C.S. File No 67/10-40

RENEWAL

Monument Set (Procedure and Description)

Monument Detail

New Accessories

- NW COR OF HOUSE BEARS S 15 3/4°W, 193 1/ FT. B & D TO TOP OF BRICK WAINSCOATING ON EXTERIOR.
- 17" ASH, DOUBLE BLAZED & SCRIBED "C 1/4 S 8 CS BT" BEARS S 23 1/4° E, 167 1/ FT.
- 17" DIA. TRUNK IS MOST WESTERLY OF CLUMP OF 4 W. OAK TRUNKS APPROX 48" DIA. IS SCRIBED "C 1/4 S 8 CS BT" BEARS N 84°E, 112 5/ FT. MEAS. TO CENTER OF ROOT CROWN. (THIS IS ARTMAN'S 1990 TREE PREVIOUSLY UNSCRIBED) ARTMAN'S BT TAG IS MOVED TO STAND ABOVE ALUM I.D. TAG ON SIDE OF TREE.

Sketch of Monument, Acessories, and General Area

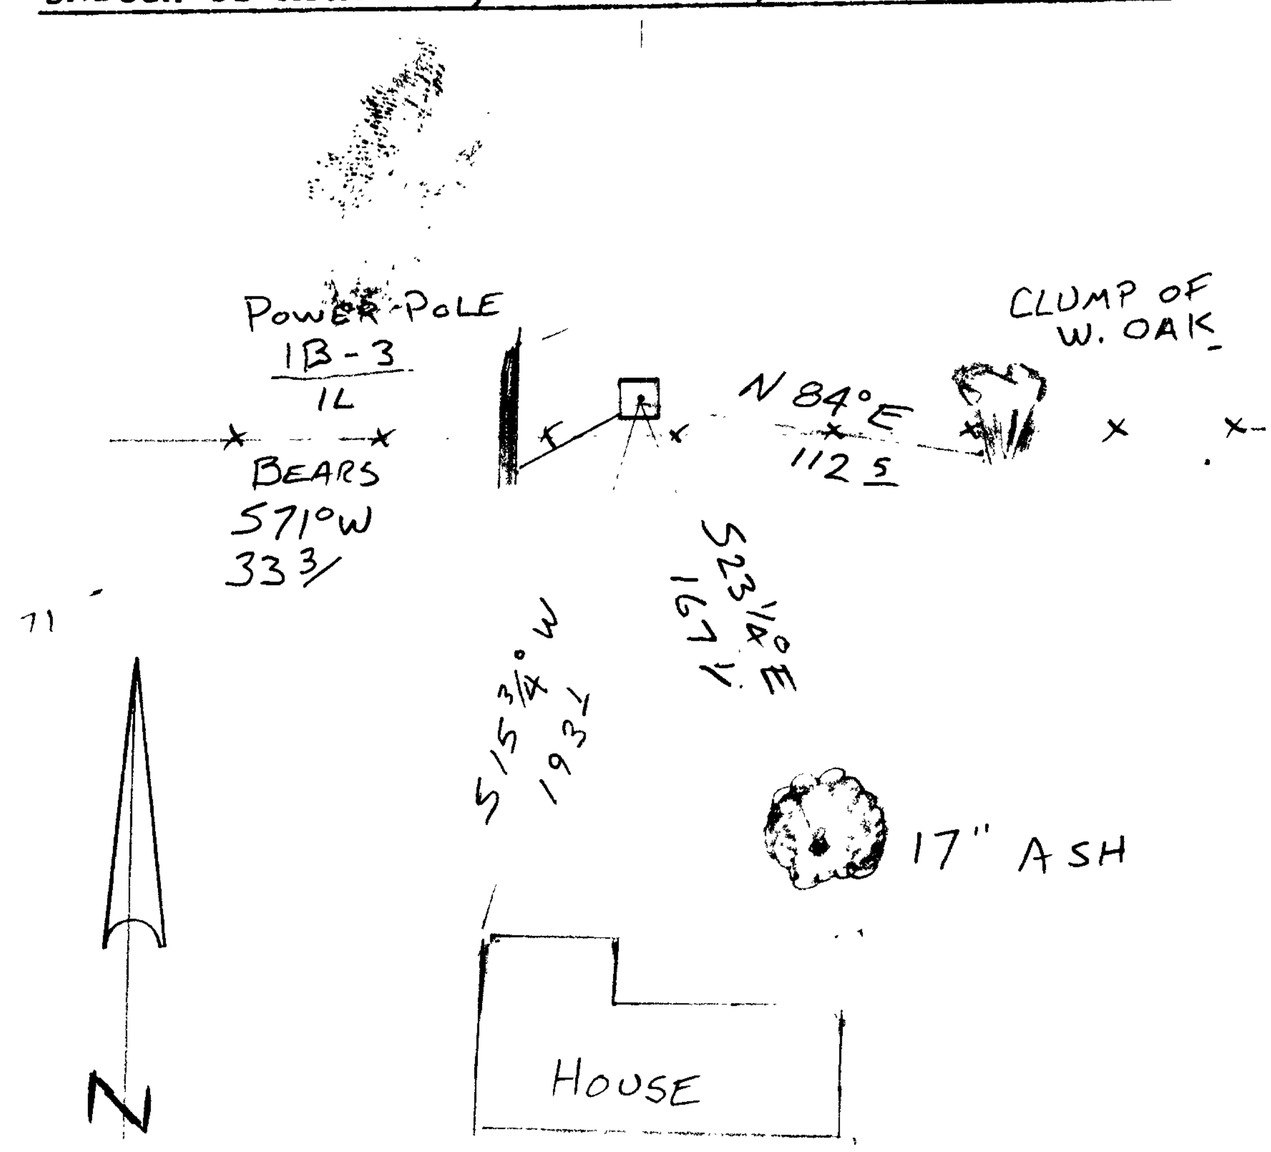

Location & Comments

CORNER LIES APPROX 6' NORTH OF E-W FENCE LINE IN NEARLY LEVEL CLEARED PASTURE.

GPS SESSION: C072510A

Comp. Declin. 16 3/4° E

Agency D.C.S.O.

Party Chief S. FLAUSE

Notekeeper J. PIKE

Witnesses

Address

Surveyor's Seal

REGISTERED PROFESSIONAL LAND SURVEYOR

Randall W. Smith

EXPIRES 6-30-06

OREGON
JULY 25, 1990
RANDALL W. SMITH
2468

67/10-40