FILED
9/26/2007 JC
Survey
Map:
Narrative:
Corner Rpt: 67/24-13

GOVERNMENT CORNER RESTORATION FORM

Township 24S Range 5W Sec. 11 County DOUGLAS

State OR Date 8/23/2007 No. 540500

Corner Designation

SOUTH 1/4 SEC. 11

DOUGLAS COUNTY SURVEYOR

____ Condition Report Only
____ Not Found
✓ Renewed
____ Unrecorded
____ Surveyed In
____ Referenced Out

MONUMENT DETAIL

Previous Renewals

Monument(s) Found: (Condition and Source)

PROPERLY MKD.
2 1/2" DIA BRASS CAP ON 1 1/4" O.D. IRON PIPE FIRMLY SET. PROJECTS 15" ABOVE GROUND. NOTED BRASS CAP STAMPING IS SITUATED TO WEST

SURVEYORS OFFICE COUNTY T24S R5W 1/4 S 11 / S 14 1960

Accessories Found:

26" NOW 33" DIA. B. OAK, FULLY HEALED DOUBLE BLAZE BEARS N77°W, 53.4 FT. (AGREES W/REC) 1960 BT

24" R. FIR NOW GONE (1960 BT)

NO TRACE OF O.B.T. NOTED IN 1960

C.S. File No 67/24-13

RENEWAL

Monument Set (Procedure and Description)

Monument Detail

New Accessories

8" DIA. W. OAK, DOUBLE BLAZED & SCRIBED "1/4 S 14 CS BT"
BEARS S 41° W, 39.1 FT.
8" DIA. MADRONE, DOUBLE BLAZED & SCRIBED "1/4 S 11 CS BT"
BEARS N 11½° E, 26.8 FT.
16" DIA. D. FIR, DOUBLE BLAZED & SCRIBED "1/4 S 14 CS BT"
BEARS S 75° E, 90.7 FT.

Sketch of Monument, Acessories, and General Area

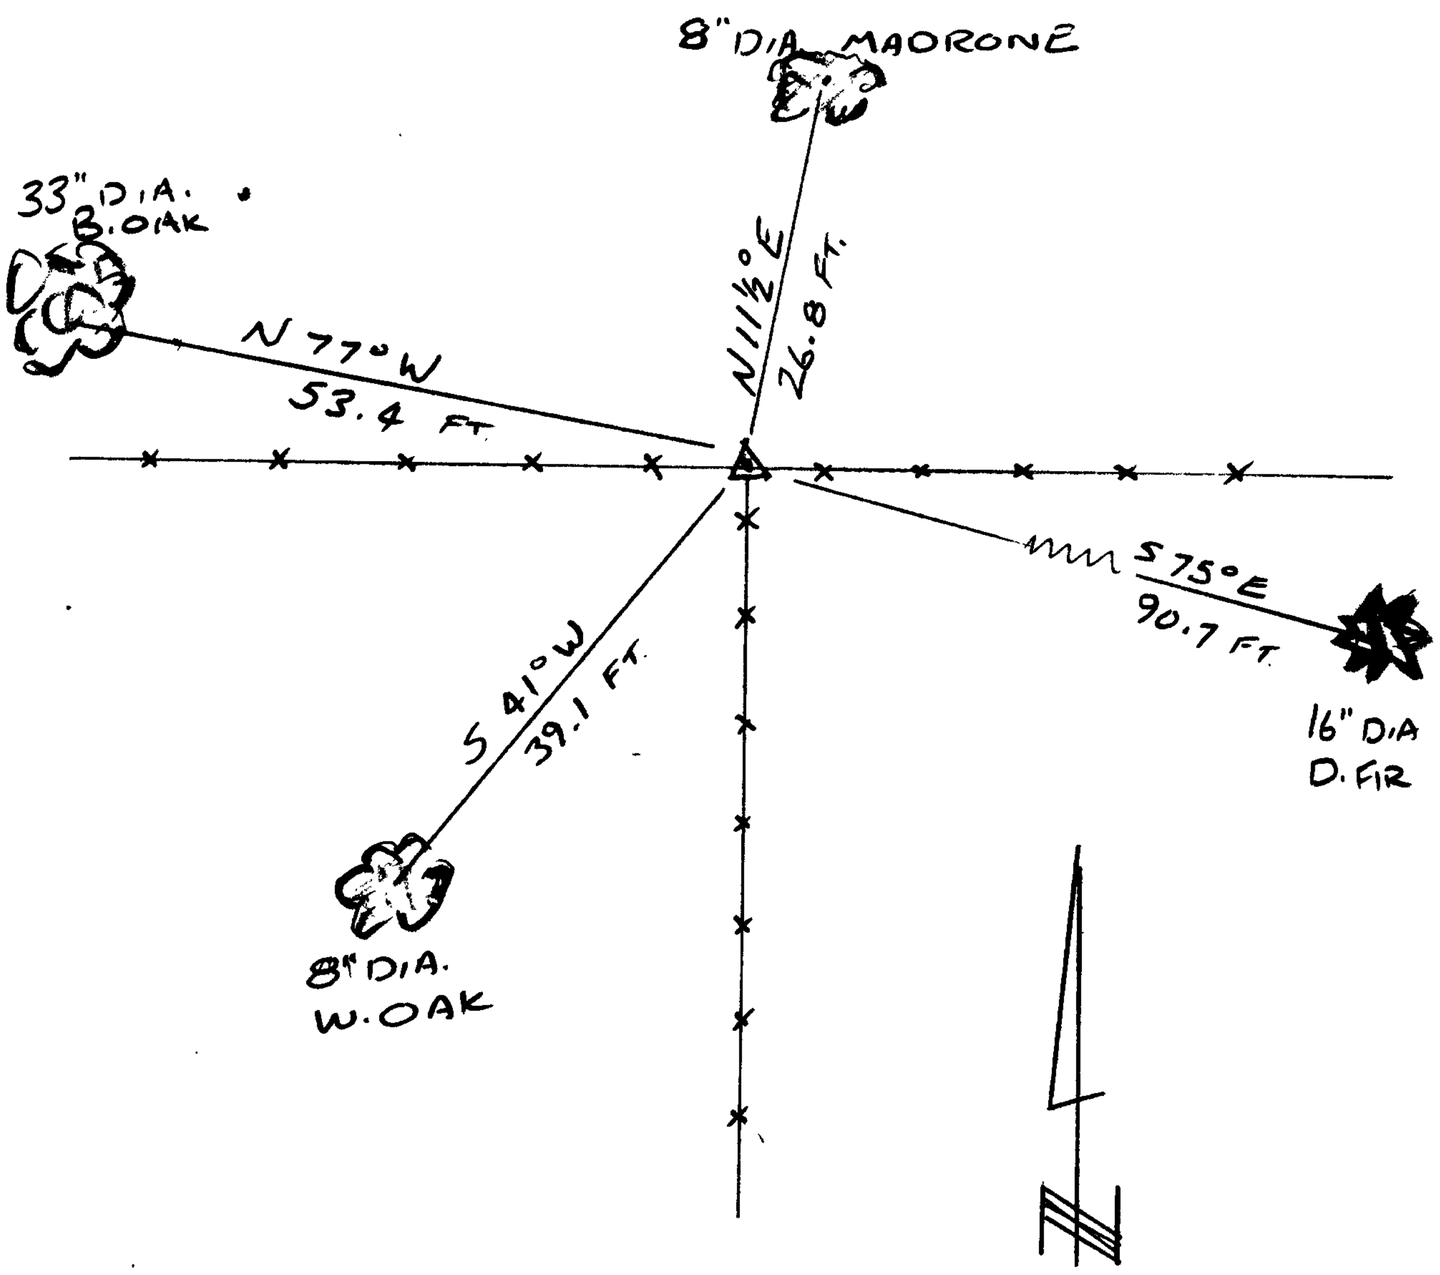

Location & Comments

LAYS AT NW CORNER OF ROLLING PASTURE LAND WITH FENCES EXTENDING EAST - WEST AND SOUTH

C 082212 A

Comp. Declin. 16¼° E
Agency D. C. S. O.
Party Chief S. FLAUSE
Notekeeper J. PIKE
Witnesses K. INDA

Address

Surveyor's Seal

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Randall W. Smith
RENEWAL 6-30-08

OREGON
JULY 25, 1980
RANDALL W. SMITH
2468