


11/19/81

OFFICE OF THE
DOUGLAS COUNTY SURVEYOR



T 26 S, R 3 W, Sec. 10

Station: 2M

Set By (Agency): USC & GS

Date: 1935 RESET 1969

VERTICAL CONTROL

NGVD 29

Elevation: 751.448 NGS(USC&GS) Line # 94 Pg. 4 USGS Line # _____

Order

Of Precision 1st Agency: USC & GS Proj. #: _____ Date: 1961

CORPCON 6 NAVD 88

755.062 FT

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) _____ X(Easting) _____
(South Zone)

Order

Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: From Idleld Park Post Office

go West on Hwy 138 1.5 mi. to station on

left. Approx. 3.5 mi. East of Glide.

Station is disk in 2'x5' boulder in NE cor.

of small pasture and 5' lower than asphalt.

Station is 45' S. of Hwy and 12' E. of


corral fence corner. 12' S. of Southerly

R/W fence and approx. 6' West of North-South

fence.

VICINITY: IDLEYLD AREA - HWY 138

SKETCH

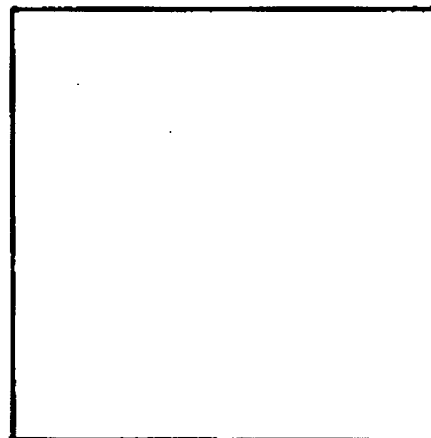

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.