OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

Station: RM 1 E1/4 S1 T 22 S, R 12W , Sec 1
Set By (Agency): DCSO
Date Set: RESET 1990
Recovered By RWS,SJF
Date Recovered 1/18/90
Recovered By
Date Recovered
Recovered By
Date Recovered



220-12W-01-055 22S 12W 01
RM 1 E 1/4

NAD 83	757865.51	3978866.83
	43°41'28"	124° 3' 51"

VERTICAL CONTROL

Elevation: N/A NGS Line # USGS Line # OSHD Line #
Precision: Agency: Proj. # Date:

HORIZONTAL CONTROL

South Zone State Plane Coordinates: Y(Northing) 757,900.59 X(Easting) 1,057,906.11
Precision: 1/5,000 Agency: DCSO Proj. # 2015 Date: 1990
Approximate Geographic Position: Latitude 43°41'29" Longitude 124°03'47"

DESCRIPTION and TO REACH

A 2 3/8 inch diam. brass cap stamped
" DOUGLAS COUNTY SURVEYORS "

T22S
RM 1
R 12 W | S1 | S6 | R 11 W
RESET
1990

on a 1 3/8inch O.D. iron pipe, 32 inches long, set protruding 14 inches above ground and surrounded by a 2 1/2 foot diameter mound of stone.

TO REACH:

From the intersection of Schofield Road (Co.Rd.#55) and State Highway 38 in T22S,R12W, Sec. 1 proceed southeasterly along State Highway 38 approximately 800 ft. to monument on right.

SKETCH

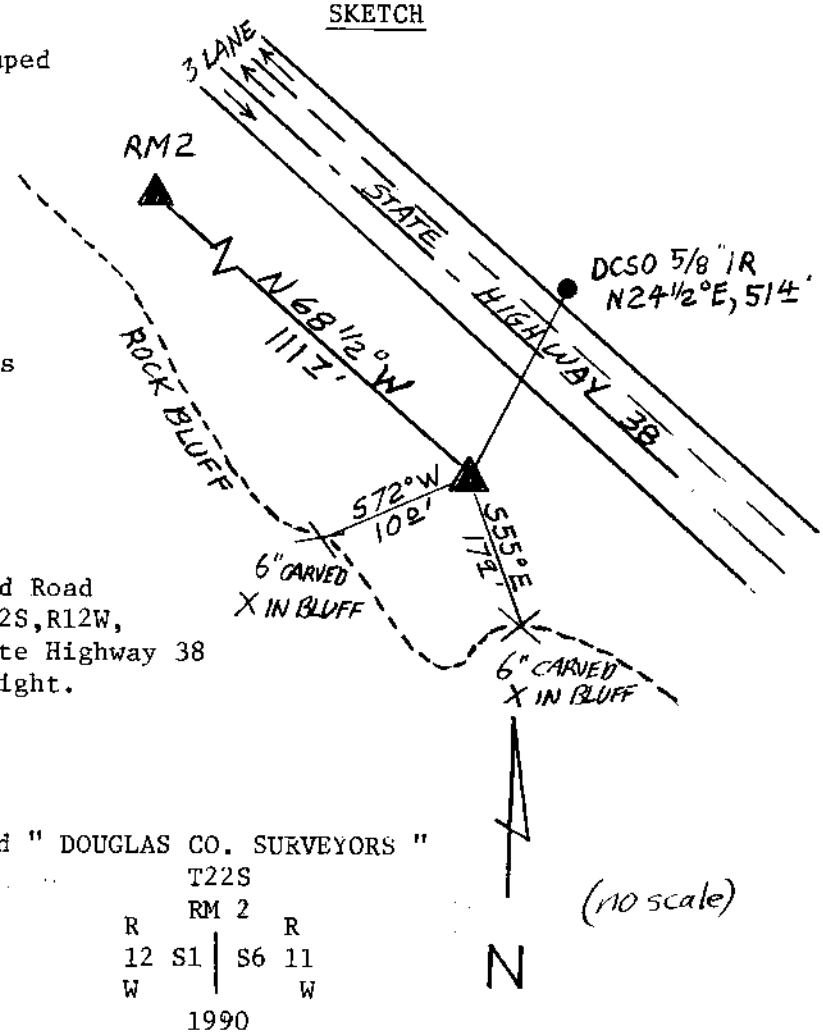

Reference Marks: A DCSO drill cap stamped " DOUGLAS CO. SURVEYORS " bears N 65°45'16" W, 111.7 ft. distant (grid.).

T22S
RM 2
R 12 W | S1 | S6 | R 11 W
1990
OFFICE

Note: See M 42-27

Note: For further information, contact the Douglas County Surveyor's Office, Room 205 Douglas County Justice Building, Roseburg, OR 97470. Phone 440-4278. Douglas County residents outside the Roseburg calling area, dial toll free 1-800-452-0991.