OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

Station: SW Cor Sec.28 T 28 S, R 6 W , Sec 28

Set By (Agency): DCSO

Date Set: 1961

Recovered By RS, SJF

Date Recovered Nov. 29,1984

Recovered By

Date Recovered

Recovered By

Date Recovered

300200

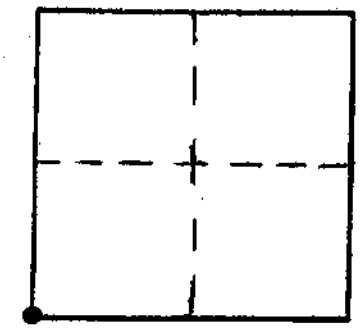

280-06W-28-005 28S 06W 28
SW CORNER

NAD	535329.22	4140383.70
83	43° 5'53"	123°25'28"

VERTICAL CONTROL

Elevation: _____ NGS Line # _____ USGS Line # _____ OSHD Line # _____

Precision: _____ Agency: _____ Proj. # _____ Date: _____

HORIZONTAL CONTROL OCS 27

South Zone State Plane Coordinates: Y(Northing) 535,364.41 X(Easting) 1,219,425.44

Precision: 1/25,000 Agency: DCSO Proj. # 2008 & 2013 Date: 1984

Approximate Geographic Position: Latitude 43°05'54" Longitude 123°25'24"

DESCRIPTION and TO REACH

A DCSO disk stamped "COUNTY SURVEYORS OFFICE", protruding 6 inches above the ground.

T28S R6W
S29 | S28
S32 | S33
1961

From the intersection of State Highway 99 and Hult Avenue (Co, Rd, #158 A) in T28S,R6W,Sec.29, proceed northerly along Highway 99, approximately 250 feet, to the intersection with a private roadway on the right. Follow private roadway, crossing Southern Pacific Railroad tracks, approximately 100 feet easterly, to intersection with Roseburg Lumber property access road, on the right. Follow Roseburg Lumber road, southerly, approximately 0.35 miles, to intersection on left. The monument is approximately 500 feet easterly from the intersection, up a steep hill.

SKETCH

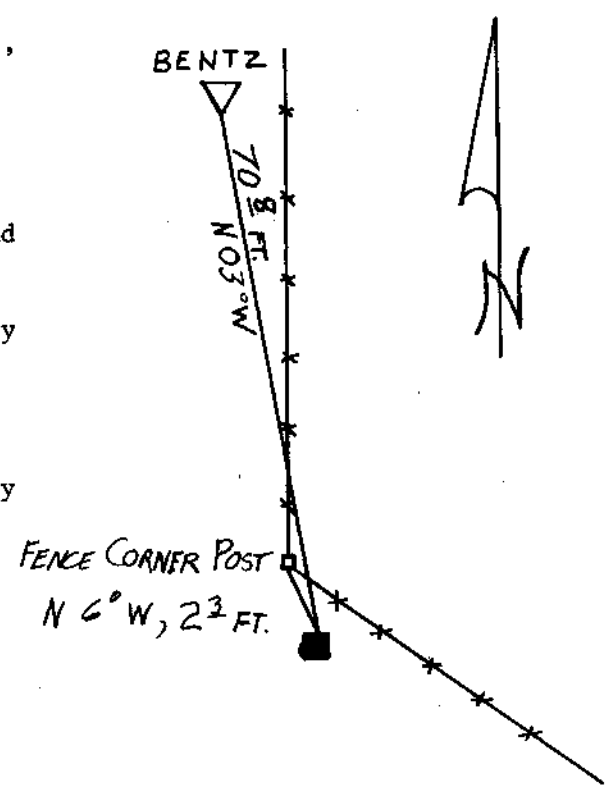

Reference Marks:

A DCSO disk stamped 'BENTZ 1972" bears N 1°14'39.0"W 70.78 ft. (grid) dist.

Note: For further information, contact the Douglas County Surveyor's Office, Room 205 Douglas County Justice Building, Roseburg, OR 97470. Phone 440-4278. Douglas County residents outside the Roseburg calling area, dial toll free 1-800-452-0991.