

A-028

12/21/81


OFFICE OF THE

a-023  
ADA

225 12W 7

DOUGLAS COUNTY SURVEYOR

NAD 75°41'5.68" 2745176.76  
85 43°40'41" 124°10'42"



T 22 S, R 12W, Sec. 7

Station: ADA

Set By (Agency): US Army Corp of Eng.

Date: 1969

VERTICAL CONTROL CORCON 6 NAVD 88 12.713 FT

Elevation: 9.133 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision 2nd Agency: DCSO Proj. #: 2007 CS 61/16 Date: 1981

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 754,450.64 X(Easting) 1,027,216.09  
(South Zone)

(C.S. 61/16)


Order  
Of Precision 1/5,000 Agency: DCSO Proj. #: 2008 Date: 1980

Approximate Geographic Position: Latitude= 43°40'41" Longitude= 124°10'42"

DESCRIPTION: Brass cap set in concrete

near top of bank, most W'stly side of most  
E'stly boat basin in Salmon Harbor. Approx.  
1074 ft. NNW from NW cor. of bridge on 9th  
blvd. 800ft. from Hwy. 101.

SKETCH

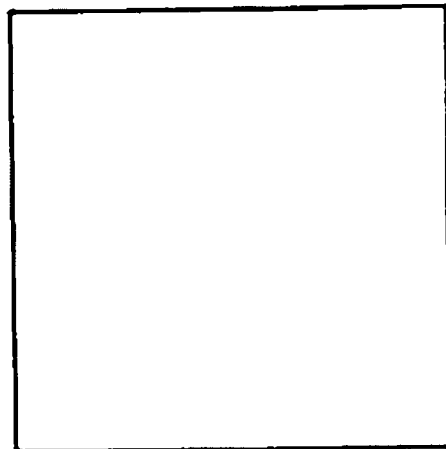

VICINITY: Salmon Harbor, Winchester Bay Ore.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.