


OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

A-046  
AMBROSE

252 5W 11

440 711024.68 419169.86  
92 48'35" 5" 123°15' 22"



T 23 S, R 5W, Sec. 11

Station: Ambrose

Set By (Agency): DCSO

Date: 1978

VERTICAL CONTROL

Elevation: \_\_\_\_\_ NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision \_\_\_\_\_ Agency: \_\_\_\_\_ Proj. #: \_\_\_\_\_ Date: \_\_\_\_\_

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 711,061.25 X(Easting) 1,270,209.45  
(South Zone)


Order  
Of Precision 1/25,000 Agency: DCSO Proj. #: 2010-6 Date: 1978  
CS 60/23

Approximate Geographic Position: Latitude= \_\_\_\_\_ Longitude= \_\_\_\_\_

DESCRIPTION: A standard DCSO brass cap

marked "Ambrose 1978" set in a 6" x 36"  
concrete sewer tile buried flush with ground,  
1.85 mi. N. along I-5 from the Yoncalla-Drain  
exit #150, 2 ft. W. of the E'stly R/W fence  
of I-5 approx. 25 ft. higher than the roadway  
and 98 ft. E'stly of the centerline of the  
N.B. lane of I-5 Survey marker nearby.

SKETCH

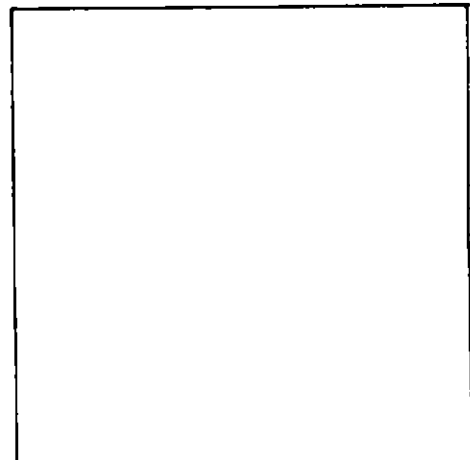

VICINITY: Approx. 1.85 mi. N. of Yoncalla-  
Drain exit #150 along I-5.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.