


B-008

11/19/81

OFFICE OF THE
DOUGLAS COUNTY SURVEYOR



T 25 S, R 6W, Sec. 24

Station: B335

Set By (Agency): ORE. GEOD. SURVEY

Date: 1934

VERTICAL CONTROL

Elevation: 453.014 NGS(USC&GS) Line # 98 USGS Line # _____

CORPSCON6 NAVD88 456.507 FT.

Order

Of Precision 2nd Agency: USC & GS Proj. #: _____ Date: 1957

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 639804 X(Easting) 4160868
(South Zone)

Order

Of Precision 615 SCALED Agency: DCSO Proj. #: _____ Date: 2014

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: AT A HWY. INTERSECTION 69 FT.

S. OF THE N.E. RIGHT OF WAY CORNER, 8 FT.

W. OF A FENCE CORNER. A STATE SURVEY


STANDARD DISK, STAMPED "452 B 335 1934".

AND SET IN TOP OF A CONCRETE POST.

VICINITY: 2.6 MI. W. ALONG UMPQUA RD.

FROM SPRR AT SUTHERLIN.

SKETCH

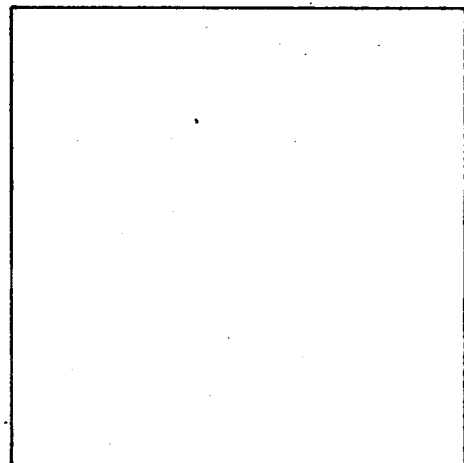

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.