

B-14


OFFICE OF THE

b-016  
B 666

24S 5W 5

DOUGLAS COUNTY SURVEYOR

NAD 686407.55 4174724.76  
83 43°30'56" 123°18'54"



T 24 S, R 5W, Sec. 5

Station: B-666

Set By (Agency): OSHD

Date: 1975

CORPCON 6 NAVD 88  
610.71 FT

VERTICAL CONTROL

N6VD 29

Elevation: 607.14 NGS(USC&GS) Line # 369 USGS Line # \_\_\_\_\_

Order  
Of Precision 3rd Agency: OSHD Proj. #: \_\_\_\_\_ Date: 1956

HORIZONTAL CONTROL

OCS 27

Oregon State Plane Coordinates: Y(Northing) 686,441.91 X(Easting) 1,253,764.94  
(South Zone)

Order  
Of Precision 1/25,000 Agency: DCSO Proj. #: 2010-4 Date: 1978

Approximate Geographic Position: Latitude= 43°30'57" Longitude= 123° 18' 50"


DESCRIPTION: A standard OSHD B.C. stamped

"B-666 1975" and set on top of the S.W. Cor  
of a conc. box culvert headwall, approx. 8 ft.  
W. of the guardrail & approx. 18 ft. N. of the  
S. end of the guardrail along the W'stly edge  
of the S. bound exit lanes from I-5 directly  
W. of the exit 146 sign.

Abridged version  
keyed into SARS.

VICINITY: Rice Valley exit S. bound on I-5.

SKETCH

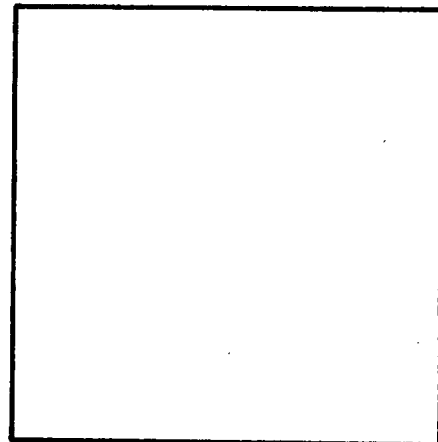

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.