

C-117


OFFICE OF THE

DOUGLAS COUNTY SURVEYOR

C-117
CREEPY

245 SW 32

NAD 83 537409.21 4174200.62
489881.00 122718.48



T 24 S, R 5 W, Sec. 32

Station: CREEPY (DCSO)

Set By (Agency): OSHD

Date: 1980 (DCSO)

CORCON 6 NAVD 88
475,354 FT

VERTICAL CONTROL

Elevation: 471.845 NGS(USC&GS) Line # _____ USGS Line # _____

Order of Precision 2nd-I Agency: DCSO Proj. #: 2006 Date: 1981
(Calapooya)

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) 657,443.64 X(Easting) 1,253,241.21
(South Zone)

Order of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1981
(Calapooya)

Approximate Geographic Position: Latitude= 43° 26' 10" Longitude= 123° 18' 43"

DESCRIPTION: A OSHD brass cap set in top of
wall on overpass 2.7 ft. above pavement 14.5
ft. West of center of pavement, 20.5 ft. NW
along Westerly side of overpass from SW end
of conc. wall. 0.8 ft. North on West side
from conc. bridge deck.


TO REACH: From intersection of Hwy 99 and

Locust St. in Oakland proceed N'ly along Hwy

99 to exiting traffic from I-5. Mon. on over-
pass of Oakland exit #138 off I-5.

VICINITY: On Southerly end West side of over-
pass Oakland exit #138

SKETCH

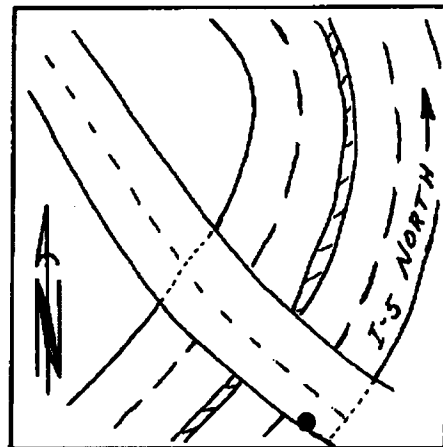

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.