


D-003

d-003
D 266

23 5W 22

OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

NAD 83 598780.91 4123140.57
43439.1 123°17' 5"



T 23 S, R 5W, Sec. 22

Station: D-266

Set By (Agency): USC & GS

Date: 1934

CORPSCONG NAVD 88
437.816 FT

VERTICAL CONTROL

Elevation: 434.231 NGS(USC&GS) Line # 6 OSHD USGS Line # 369

Order Of Precision 1 st Agency: USC&GS Proj. #: _____ Date: 1956

HORIZONTAL CONTROL


Oregon State Plane Coordinates: Y(Northing) 698,815.38 X(Easting) 1,262,180.69
(South Zone)

Order Of Precision 1/25,000 Agency: DCSO Proj. #: 2010-6 Date: 1978
CS 60/23

Approximate Geographic Position: Latitude= _____ Longitude= _____

DESCRIPTION: A standard USC & GS brass cap
marked "D-266 1934" set on top of the S'thly
end of the W'thly culvert headwall, 10 ft.,
lower than the road surface of Old Hwy. 99,
and 0.95 mi. N. along old Hwy 99 from the
intersection of the Frontage Road and the
NB I-5 exit road in Rice Hill.

SKETCH

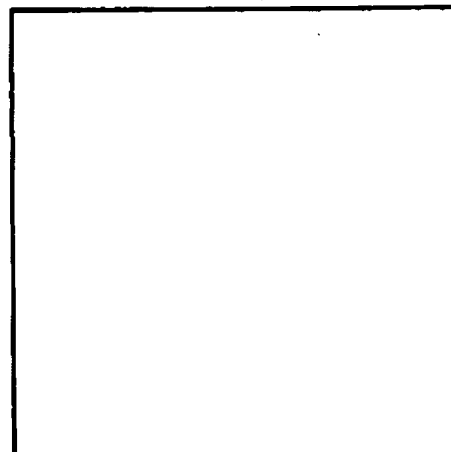

VICINITY: Approx. 1 mi. N. of Rice Hill along
old Hwy. 99.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.