


D-004

D-004  
D 451

202 10 6

OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR

452 745738.72 1209480.97  
25 48 40 10 123412 57



T 22 S, R 4W, Sec. 8

Station: D 451

Set By (Agency): OSHD

Date: 1962

VERTICAL CONTROL

CORASCOR 6 NAVD 88  
529.72 FT

Elevation: 526.064 NGS(USC&GS) Line # \_\_\_\_\_  
OSHD  
USGS Line # 369

Order  
Of Precision 3rd Agency: OSHD Proj. #: \_\_\_\_\_ Date: 1977

HORIZONTAL CONTROL


Oregon State Plane Coordinates: Y(Northing) 742,123.60 X(Easting) 1,285,519.28  
(South Zone)

Order  
Of Precision 1/25,000 Agency: DCSO Proj. #: 2008 Date: 1979

Approximate Geographic Position: Latitude= \_\_\_\_\_ Longitude= \_\_\_\_\_

DESCRIPTION: OSHD disk in walk at NW cor.  
of the structure at Curtis Cr. connection  
39 ft. W. of S.B. centerline, disk stamped  
"D 451 1962".

SKETCH

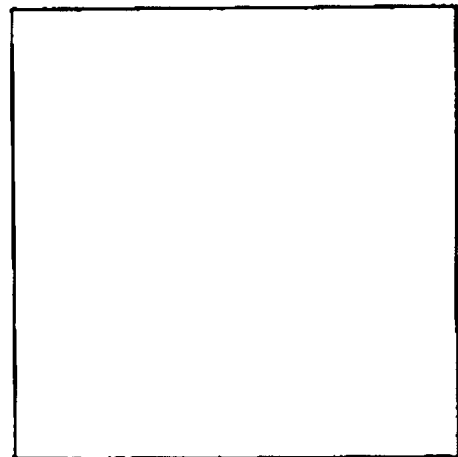

VICINITY: Approx. 3.5 mi. S. along I-5 from  
Anlauf grade separation structure, approx.  
M.P. 159.0.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.