

OFFICE OF THE  
DOUGLAS COUNTY SURVEYOR


T 21 S, R 12W, Sec. 25

Station: E. Gardiner Gage Control

Set By (Agency): U.S. Army Corps of  
Eng.

Date: 1965

DESIGNATION  
E-010



VERTICAL CONTROL

NGVD 29

Elevation: 16.93 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision 3rd Agency: DCSO Proj. #: 2006 Date: 1989

HORIZONTAL CONTROL

Oregon State Plane Coordinates: Y(Northing) \_\_\_\_\_ X(Easting) \_\_\_\_\_  
(South Zone)


Order  
Of Precision \_\_\_\_\_ Agency: \_\_\_\_\_ Proj. #: \_\_\_\_\_ Date: \_\_\_\_\_

Approximate Geographic Position: Latitude= \_\_\_\_\_ Longitude= \_\_\_\_\_

DESCRIPTION: From intersection of Coast Hwy.

101 & Smith River Rd. N. of Reedsport,  
proceed NE'stly along Smith River Rd. 0.6 mi.  
to gravel rd. on rt., go rt. approx. 0.2 mi.  
to a RR crossing. Proceed across tracks  
to the station on left, approx. 28 ft. E.  
of most W'stly rail, 10 ft. N. of an obscure  
dirt rd. & 2 ft. W of white, wooden post.  
The Brass cap Marked, U.S. Army Corps of Eng-  
ineers Survey Mark and designated "East Gardin-  
er Gage Control 1965" is set in concrete and  
flush with ground.  
VICINITY: Approx. 0.8 mi. E. of Hwy. 101 &  
Smith River Rd. junction along RR tracks.

SKETCH

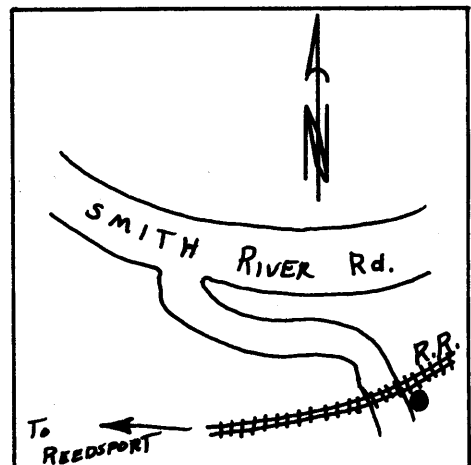

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.