


OFFICE OF THE
DOUGLAS COUNTY SURVEYOR

127851
4137648.43
127851
4137648.43



T 25 S, R 6 W, Sec. 31
Station: HENWAY
Set By (Agency): DCSO
Date: 1980

NGVD 29 H-032 VERTICAL CONTROL CORPSON 6 NAVD 88 386.388 FT

Elevation: 382.911 NGS(USC&GS) Line # _____ USGS Line # _____

Order (Calapooya)
Of Precision 2nd - I Agency: DCSO Proj. #: 2006 Date: 1981

HORIZONTAL CONTROL


NAD 27
Oregon State Plane Coordinates: Y(Northing) 629,286.85 X(Easting) 1,216,689.82
(South Zone)

Order (Calapooya)
Of Precision 1/25,000 Agency: DCSO Proj. #: 2006 Date: 1981

Approximate Geographic Position: Latitude= 43° 21' 20" Longitude= 123° 26' 45"

DESCRIPTION: Station is a standard DCSO
brass cap set in a 6"x42" conc. filled bell-
tile buried 38" in ground. Stamped "HENWAY
1980". Witness marker is 3' North of station
and 0.5 ft. South of an East-West fenceline.
Station is 20' North of the approx. centerline
of Co Rd#32.
TO REACH: From intersection of Co Rd#6 & #32,
continue East on Co Rd#32 0.3 mi. to station
on the left.

SKETCH

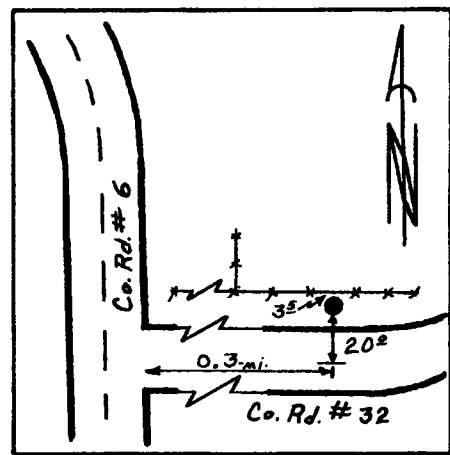

VICINITY: Approx. 1 mi. SE of Umpqua store on
Co. Rd #32.

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.