


OFFICE OF THE

DOUGLAS COUNTY SURVEYOR



I-005

T 22 S, R 12 W, Sec. 7

Station: INA

Set By (Agency): CORPS OF ENG.

Date: 1969

CORPSCOM 6 NAVD 88 12,586 FT  
VERTICAL CONTROL NGVD 29

Elevation: 9.008 NGS(USC&GS) Line # \_\_\_\_\_ USGS Line # \_\_\_\_\_

Order  
Of Precision 2nd Agency: DCSO Proj. #: 2007 CS 61/16 Date: 1981

HORIZONTAL CONTROL NAD 27


Oregon State Plane Coordinates: Y(Northing) 754,099.80 X(Easting) 1,028,037.63  
(South Zone)

Order  
Of Precision 1/15,000 Agency: DCSO Proj. #: 2008 Date: 1980

Approximate Geographic Position: Latitude= 43° 40' 38" Longitude= 124° 10' 30"

DESCRIPTION: Station mark is a standard  
Army Corps of Engineers brass cap, marked  
"INA 1969". Cap is set in 4" diameter tile  
pipe buried 0.1 ft. below surface. See  
sketch.

SKETCH

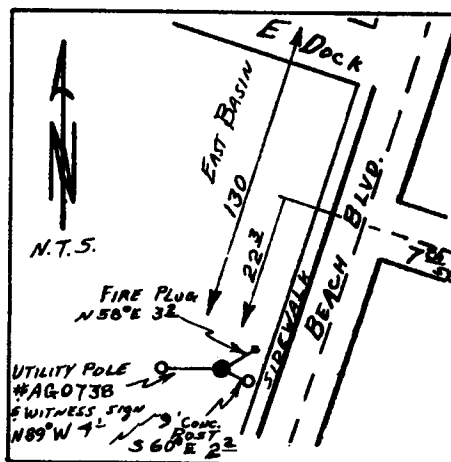

★ Note: Mon. is 20± WEST of BEACH BLVD. &  
± 38 WEST of WEST EDGE of SIDEWALK

VICINITY: Salmon Harbor (Winchester Bay)

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.