

11/18/81


OFFICE OF THE

j-024
JOAN

225 4W 8

DOUGLAS COUNTY SURVEYOR

NAD 741269.37 4206187.50
83 43°40' 8" 123°12'11"



T 22 S, R 4W, Sec. 8

Station: JOAN

Set By (Agency): DCSO

Date: 1978

VERTICAL CONTROL

Elevation: _____ NGS(USC&GS) Line # _____ USGS Line # _____

Order
Of Precision _____ Agency: _____ Proj. #: _____ Date: _____

HORIZONTAL CONTROL

NAD 27

Oregon State Plane Coordinates: Y(Northing) 741,304.05 X(Easting) 1,285,226.73
(South Zone)


Order
Of Precision 1/25,000 Agency: DCSO Proj. #: 2008 Date: 1979

(North County)

Approximate Geographic Position: Latitude= 43° 40' 09" Longitude= 123° 12' 07"

DESCRIPTION: Station mark is a standard DCSO brass cap marked "JOAN 1979". Cap is set in a conc. filled bell tile measuring 6"x36". set flush with ground. Station is approx. level with Westerly edge of I-5 pavement and 24 ft. West of Westerly edge of pavement. Station mark is approx. 530 ft. South of overpass at I-5 exit #159. Station is 13.5 ft. East and 8.5 ft. lower than the Westerly R/W fence. Station is 85 ft. Southerly from utility pole #5B-128.

SKETCH

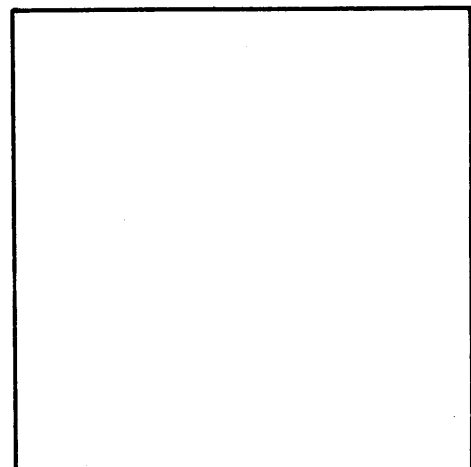

TO REACH: From the overpass at I-5 exit #159 proceed Southerly along I-5 0.1 mile to monument on the West side.

A DCSO disk stamped "JOAN RM 1 1979" bears S 8° 49' 25" W 117.87ft. (grid)
A DCSO disk stamped "JOAN RM 2 1979" bears S 79° 47' 43" E 124.28 ft. (grid)

NOTE: For Possible Further Information On This Station, Please Contact The Douglas County Surveyors Office, Rm. 205 Douglas County Justice Bldg., Roseburg, OR. 97470 Phone 672-3311 Ext. 272.. Douglas County residents outside the Roseburg calling area dial toll free 1-800-452-0991.